

KICV90BL



Product family Hood

Decorative wall hood **Hood Type**

Design Angled Extraction Extraction **Electronic control** Yes Perimeter extraction Yes Material Glass

EAN code 8017709262150

Hood width 90 cm **Aesthetic** Universale Colour Black **Finishing** Glass Glass Type Black Serigraphy colour Grey **Embossed** Logo



Controls



Control setting Touch control Led color Red

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-Vent









Technical Features







No. of lights 2 Light type **LED Light Power** 1 W Free outlet maximum 750 m³/h

capacity

270 W Motor power No. of filters 2

Anti-grease filters

Filter replacement indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from **ELECTRIC hob**

450 mm

150 mm

450 mm

Aluminium

Yes

SMEG SPA 27/11/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	580	66
Intensive speed	720	70

Accessories included

Tube reduction Yes

Performance / Energy Label

<	A*	A'** ↑ D

Annual Efficiency 41 kWh/a Consumption (AEChood) Energy efficieency class A+ Fluid Dynamic Efficiency 34,8 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 68 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 45,1 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 310 m³/h speed (Qmin) Air flow at maximum 580 m³/h speed (Qmax) Air flow at boost speed 720 m³/h (Qboost)

Airbourne acouistical A- 52 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-62 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 65 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0,7 **Energy Efficiency Index** 40.5 Measured air flow rate 470 m³/h at best efficiency point (Qbep) Measured air pressure 470 Pa at best efficiency point (Pbep) Measured electric 154 W power input at best **Nominal Power** 2 W consumption of the light system (WL)

efficiency point (Wbep) Average illumination of 150 lux the light on the cooking surface (Emiddle) 62 dBA Sound power level at highest setting (Lwa)

Electrical Connection

SMEG SPA 27/11/2025



Electrical connection 272 W


rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable length

1500 mm

Plug

Not present

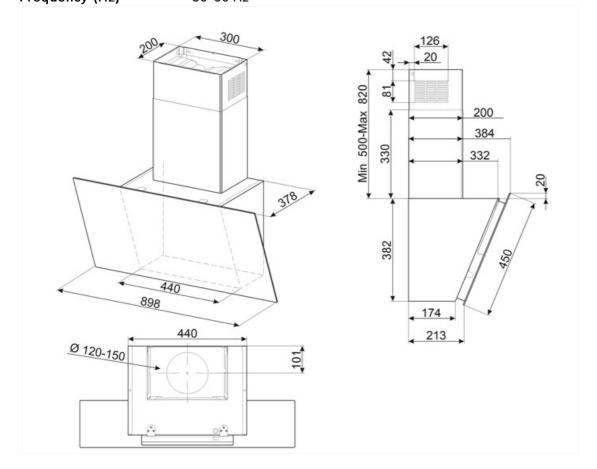

SMEG SPA 27/11/2025



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFC152

Charcoal filters Round Kit 2 pieces



KITVENT150

Motor inlet 150 mm with check valve

SMEG SPA 27/11/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



A smart infrared system, which allows a hood and hob with this feature to work together.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 27/11/2025