

KICV90BL2



Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709344801
Hood width	90 cm



Aesthetics

Aesthetics	Universal	Glass Type	Black
Colour	Black	Serigraphy colour	Grey
Finishing	Glass	Logo	Embossed

Controls



Control setting	Touch control	Led colour	Red
-----------------	---------------	------------	-----

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Free outlet maximum capacity	770 m ³ /h	Minimum distance from GAS hob	450 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	450 mm
No. of filters	2		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	310	52
Speed 2	420	56

Speed 3	620	63
Intensive speed	770	68

Accessories Included

Tube reduction Yes


Performance / Energy Label



Annual Efficiency Consumption (AEChood)	43 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency (FDE)	34,9	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index per first cavity	40,8
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	440 m³/h
Grease Filtering Efficiency (GFE)	45,1 %	Measured air pressure at best efficiency point (Qbep)	468 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	164 W
Air flow at minimum speed (Qmin)	300 m³/h	Normal Power of the light system (WI)	2.2 W
Maximum extraction rate	620 m³/h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Intensive extraction rate	770 m³/h	Sound power level at highest setting (Lwa)	63 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		

Electrical Connection

Nominal power	272 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

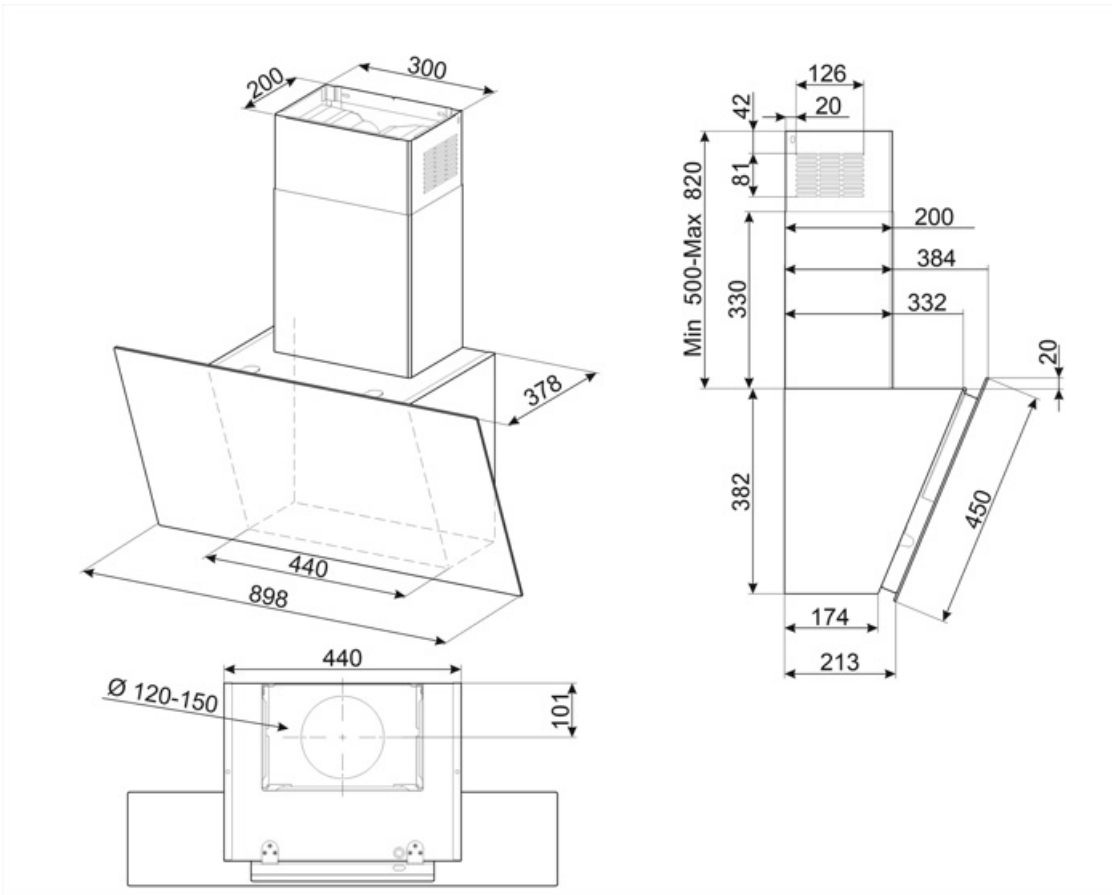

Not included accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFC152











Charcoal filters Round Kit 2 pieces



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		A smart infrared system, which allows a hood and hob with this feature to work together.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.