KICV90BL2



Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709344801
Hood width	90 cm
Aesthetics	Universal
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Embossed

Controls

Control setting	Touch control	**Led colour**	Red

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent	

Technical Features

No. of lights	2	**Anti-grease filters**	Aluminium
Light type	LED	**Filter replacement indicator**	Yes
Light power	1 W	**Vent outlet**	150 mm
Free outlet maximum capacity	770 m³/h	**Minimum distance from GAS hob**	450 mm
Motor power	270 W	**Minimum distance from ELECTRIC hob**	450 mm
No. of filters	2		

Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	620	63
Intensive speed	770	68

Accessories Included

Tube reduction	Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	43 kWh/year
Energy efficiency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	34,9
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	68 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	45,1 %
Grease Filtering Efficiency Class (GFEC)	F
Air flow at minumum speed (Qmin)	300 m³/h
Maximum extraction rate	620 m³/h
Intensive extraction rate	770 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Time increase factor (F)	0,7
Energy Efficiency Index per first cavity	40,8
Measured air flow rate at best efficiency point (Qbep)	440 m³/h
Measured air pressure at best efficiency point (Qbep)	468 Pa
Measured electric power input at best efficiency point (Wbep)	164 W
Normal Power of the light system (Wl)	2,2 W
Average illumination of the light on the cooking surface (Emiddle)	150 lux
Sound power level at highest setting (Lwa)	63 dBA

Electrical Connection

Nominal power	272 W	**Power supply cable length**	1500 mm
Voltage	220-240 V		
Frequency (Hz)	50-60 Hz	**Plug**	No

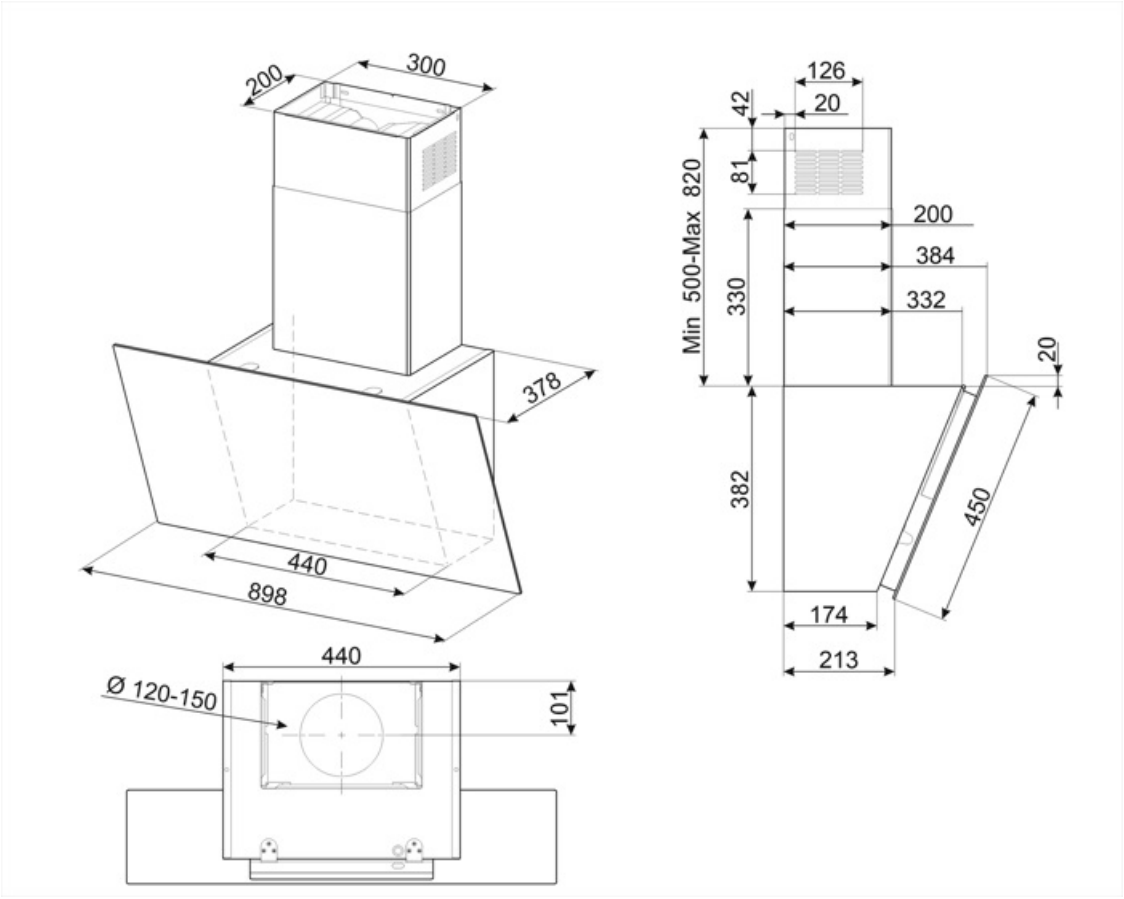

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno



KITFC152

Charcoal filters Round Kit 2 pieces

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A smart infrared system, which allows a hood and hob with this feature to work together.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.