

KICV90BL2



Product family

Hood

Hood Type

Chimney Cooker Hoods

Design

Angled

Extraction

Ducted out or re-circulation possible

Electronic control

Yes

Perimeter extraction

Yes

Material

Glass

EAN code

8017709344801

Hood width

90 cm

Aesthetics

Universal

Colour

Black

Finishing

Glass

Glass Type

Black

Serigraphy colour

Grey

Logo

Embossed



Controls



Control setting

Touch control

Led colour

Red

Program / Functions

No. of speeds

3

Intensive speed



24h air filter function




Time-setting options



Auto-Vent



Technical Features



No. of lights

2

Anti-grease filters

Aluminium

Light type

LED

Filter replacement

Yes

Light power

1 W

indicator

Free outlet maximum capacity

770 m³/h

Vent outlet

150 mm

Motor power

270 W

Minimum distance from GAS hob

450 mm

No. of filters

2

Minimum distance from ELECTRIC hob

450 mm

Non return valve Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	620	63
Intensive speed	770	68

Accessories Included


Tube reduction Yes

Performance / Energy Label

Annual Efficiency Consumption (AEChood)	43 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)
Energy efficiency class (A+ EEC)		Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)
Fluid Dynamic Efficiency (FDE)	34.9	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index per first cavity
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)
Grease Filtering Efficiency (GFE)	45.1 %	Measured air pressure at best efficiency point (Qbep)
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)
Air flow at minimum speed (Qmin)	300 m ³ /h	Normal Power of the light system (WI)
Maximum extraction rate	620 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)
Intensive extraction rate	770 m ³ /h	Sound power level at highest setting (Lwa)

Electrical Connection

Nominal power	272 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

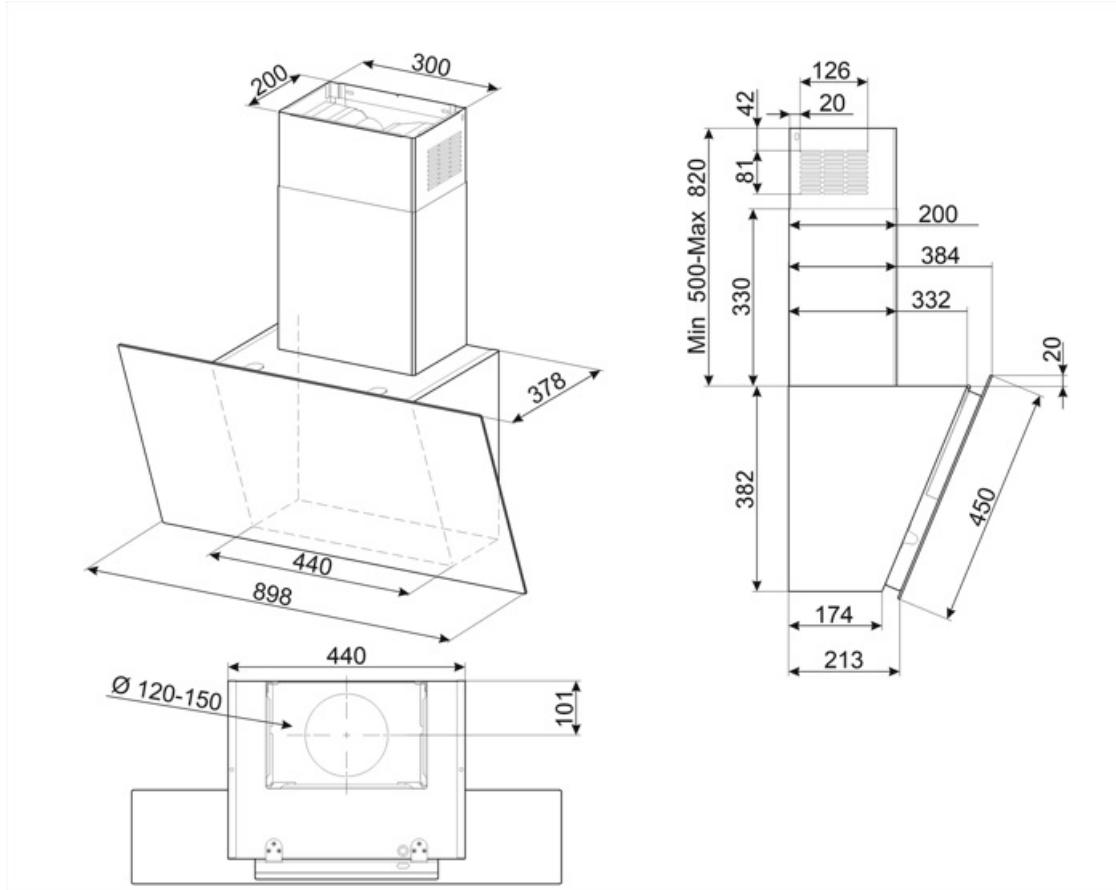

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFC152

Charcoal filters Round Kit 2 pieces



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A smart infrared system, which allows a hood and hob with this feature to work together.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.