# KICV90BL2



| | |
|---|---|
| **Product family** | Hood |
| **Hood Type** | Decorative wall hood |
| **Design** | Angled |
| **Extraction** | Extraction |
| **Electronic control** | Yes |
| **Perimeter extraction** | Yes |
| **Material** | Glass |
| **EAN code** | 8017709344801 |
| **Hood width** | 90 cm |
| **Aesthetic** | Universale |
| **Colour** | Black |
| **Finishing** | Glass |
| **Glass Type** | Black |
| **Serigraphy colour** | Grey |
| **Logo** | Embossed |

## Controls

| | | | |
|---|---|---|---|
| **Control setting** | Touch control | **Led color** | Red |

## Program / Functions

| | |
|---|---|
| **No. of speeds** | 3 |
| **Intensive speed** | BOOST |
| **24h air filter function** | 24 |
| **Time-setting options** | |
| **Auto-Vent** | |

## Technical Features

| | | | |
|---|---|---|---|
| **No. of lights** | 2 | **Anti-grease filters** | Aluminium |
| **Light type** | LED | **Filter replacement indicator** | Yes |
| **Light Power** | 1 W | **Vent outlet** | 150 mm |
| **Free outlet maximum capacity** | 770 m³/h | **Minimum distance from GAS hob** | 450 mm |
| **Motor power** | 270 W | **Minimum distance from ELECTRIC hob** | 450 mm |
| **No. of filters** | 2 | | |

| | |
|---|---|
| **Non return valve** | Yes |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---|---|---|
| Speed 1 | 310 | 52 |
| Speed 2 | 420 | 56 |
| Speed 3 | 620 | 63 |
| Intensive speed | 770 | 68 |

## Accessories included

| | |
|---|---|
| **Tube reduction** | Yes |

## Performance / Energy Label




| | |
|---|---|
| **Annual Efficiency Consumption (AEChood)** | 43 kWh/a |
| **Energy efficicency class (EEC)** | A+ |
| **Fluid Dynamic Efficiency (FDE)** | 34.9 |
| **Fluid Dynamic Efficiency class (FDEC)** | A |
| **Lighting Efficiency (LE)** | 68 lux/W |
| **Lighting Efficiency Class (LEC)** | A |
| **Grease Filtering Efficiency (GFE)** | 45.1 % |
| **Grease Filtering Efficiency Class (GFEC)** | F |
| **Air flow at minumum speed (Qmin)** | 300 m³/h |
| **Air flow at maximum speed (Qmax)** | 620 m³/h |
| **Air flow at boost speed (Qboost)** | 770 m³/h |

| | |
|---|---|
| **Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)** | 48 dBA |
| **Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** | 63 dBA |
| **Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** | 68 dBA |
| **Time increase factor (F)** | 0.7 |
| **Energy Efficiency Index** | 40.8 |
| **Measured air flow rate at best efficiency point (Qbep)** | 440 m³/h |
| **Measured air pressure at best efficiency point (Pbep)** | 468 Pa |
| **Measured electric power input at best efficiency point (Wbep)** | 164 W |
| **Nominal Power consumption of the light system (WL)** | 2.2 W |
| **Average illumination of the light on the cooking surface (Emiddle)** | 150 lux |
| **Sound power level at highest setting (Lwa)** | 63 dBA |

## Electrical Connection

| | | | |
|---|---|---|---|
| **Electrical connection rating** | 272 W | **Power supply cable length** | 1500 mm |
| **Voltage** | 220-240 V | **Plug** | Not present |
| **Frequency (Hz)** | 50-60 Hz | | |

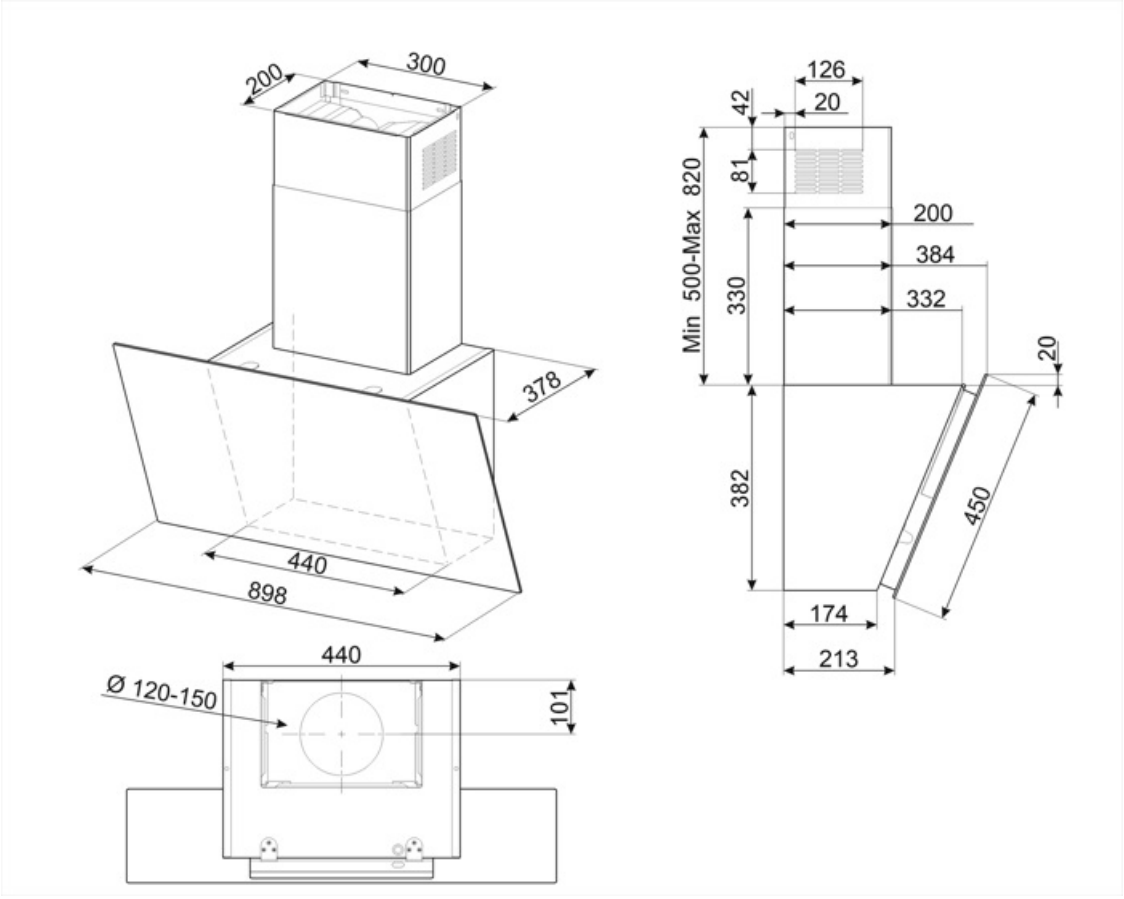

## Compatible Accessories



**KITALLFC**

Universal Charcoal filter  Stainless Steel AISI 304  The filter can be washed in dishwasher 50 °C (water and suitable detergent)  and to dry it put in the oven 180°C 25 minutes



**KITVENT150**

Motor inlet 150 mm with check valve



**KITFC152**

Charcoal filters Round Kit 2 pieces

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A smart infrared system, which allows a hood and hob with this feature to work together.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.




Intensive/turbo setting: when extra fast extraction is required.