

# KICV90BL2



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709344801
Hood width	90 cm



## Aesthetics


Aesthetic	Universale	Glass Type	Black
Colour	Black	Serigraphy colour	Grey
Finishing	Glass	Logo	Embossed

## Controls



Control setting	Touch control	Led color	Red
-----------------	---------------	-----------	-----

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Free outlet maximum capacity	770 m <sup>3</sup> /h	Minimum distance from GAS hob	450 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	450 mm
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	310	52
Speed 2	420	56

Speed 3	620	63
Intensive speed	770	68

## Accessories Included

Tube reduction Yes


## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	43 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency (FDE)	34,9	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index	40,8
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	440 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	45,1 %	Measured air pressure at best efficiency point (Pbep)	468 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	164 W
Air flow at minimum speed (Qmin)	300 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2.2 W
Air flow at maximum speed (Qmax)	620 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Air flow at boost speed (Qboost)	770 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	63 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	272 W	Power supply cable length	1500 mm
Voltage	220-240 V		

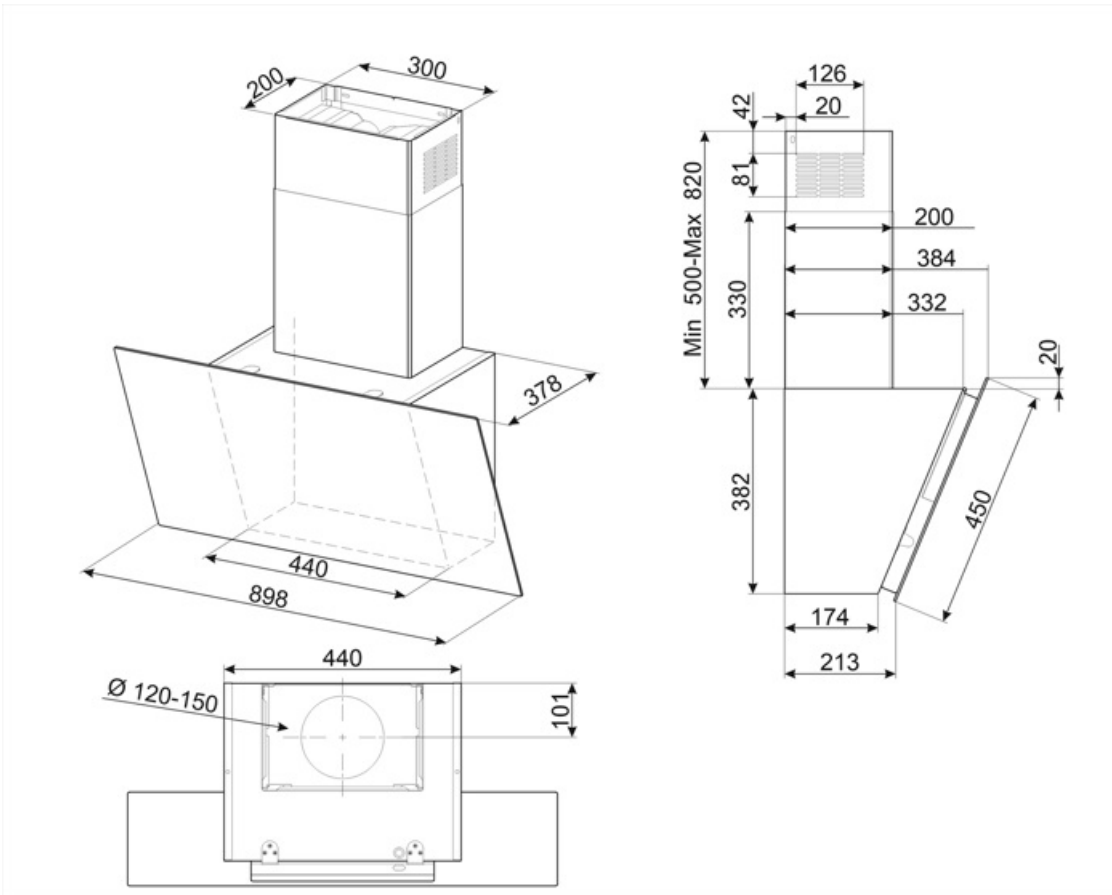

---

## Not included accessories

---

### KITFC152

Charcoal filters Round Kit 2 pieces



### KITVENT150

Imbocco motore 150 mm con valvola di non ritorno













### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		A smart infrared system, which allows a hood and hob with this feature to work together.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.