

KICV90BL2



Product family Hood

Hood Type Decorative wall hood

DesignAngledExtractionExtractionElectronic controlYesPerimeter extractionYesMaterialGlass

EAN code 8017709344801

Hood width 90 cm

Aesthetic Universale
Colour Black
Finishing Glass
Glass Type Black
Serigraphy colour Grey
Logo Embossed



Controls



Control setting Touch control Led color Red

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-Vent









Technical Features







No. of lights 2 Light type LED Light Power 1 W Free outlet maximum 770 m³/h

capacity

Motor power 270 W No. of filters 2 Anti-grease filters
Filter replacement
indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from ELECTRIC hob

Aluminium Yes

150 mm 450 mm

450 mm



Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	620	63
Intensive speed	770	68

Accessories included

Tube reduction Yes

Performance / Energy Label

A A D	
Annual Efficiency	43 kWh/a
Consumption (AEChood)	
Energy efficicency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	34,9
Fluid Dynamic Efficiency class (FDEC)	Α
Lighting Efficiency (LE)	68 lux/W
Lighting Efficiency Class (LEC)	Α
Grease Filtering Efficiency (GFE)	45,1 %
Grease Filtering Efficiency Class (GFEC)	F
Air flow at minumum speed (Qmin)	300 m³/h
Air flow at maximum speed (Qmax)	620 m³/h
Air flow at boost speed (Qboost)	770 m³/h

Airbourne acouistical A- weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	68 dBA
Time increase factor (F)	0,7
Energy Efficiency Index	40,8
Measured air flow rate at best efficiency point (Qbep)	440 m³/h
Measured air pressure at best efficiency point (Pbep)	468 Pa
Measured electric power input at best efficiency point (Wbep)	164 W
Nominal Power consumption of the light system (WL)	2,2 W
Average illumination of the light on the cooking surface (Emiddle)	150 lux
Sound power level at highest setting (Lwa)	63 dBA

Electrical Connection



Electrical connection

272 W

Power supply cable

1500 mm


rating

Voltage

220-240 V 50-60 Hz

length Plug

Not present

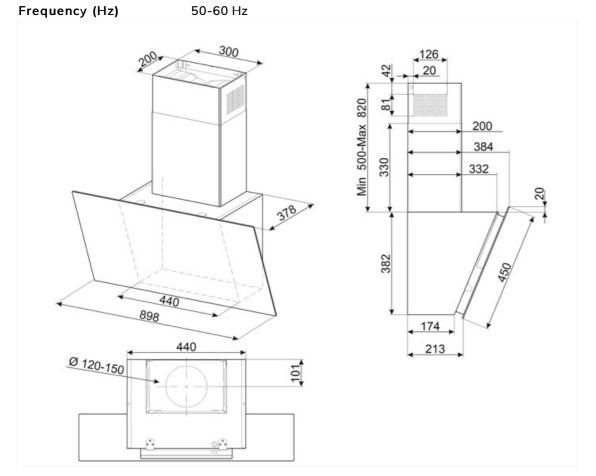



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFC152

Charcoal filters Round Kit 2 pieces



KITVENT150

Motor inlet 150 mm with check valve



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



A smart infrared system, which allows a hood and hob with this feature to work together.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.