

## KICV90BL2



### Product family

Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709344801
Hood width	90 cm
Aesthetic	Universale
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Embossed



## Controls



### Control setting

Touch control

### Led color

Red

## Program / Functions

### No. of speeds

3

### Intensive speed



### 24h air filter function




### Time-setting options



### Auto-Vent



## Technical Features



### No. of lights

2

### Anti-grease filters

Aluminium

### Light type

LED

### Filter replacement

Yes

### Light Power

1 W

### indicator

### Free outlet maximum capacity

770 m<sup>3</sup>/h

### Vent outlet

150 mm

### Motor power

270 W

### Minimum distance from GAS hob

450 mm

### No. of filters

2

### Minimum distance from ELECTRIC hob

450 mm

Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	620	63
Intensive speed	770	68

## Accessories included

Tube reduction Yes


## Performance / Energy Label

		
Annual Efficiency Consumption (AEChood)	43 kWh/a	Airbourne acoustical A- weighted sound Power
Energy efficiency class (EEC)	A+	Emission at minimum speed (SPEmin)
Fluid Dynamic Efficiency (FDE)	34.9	Airborne acoustical A- weighted sound Power
Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)
Lighting Efficiency (LE)	68 lux/W	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)
Lighting Efficiency Class (LEC)	A	Time increase factor (F)
Grease Filtering Efficiency (GFE)	45.1 %	0.7
Grease Filtering Efficiency Class (GFEC)	F	Energy Efficiency Index
Air flow at minimum speed (Qmin)	300 m <sup>3</sup> /h	440 m <sup>3</sup> /h
Air flow at maximum speed (Qmax)	620 m <sup>3</sup> /h	Measured air flow rate at best efficiency point (Qbep)
Air flow at boost speed (Qboost)	770 m <sup>3</sup> /h	Measured air pressure at best efficiency point (Pbep)
		Measured electric power input at best efficiency point (Wbep)
		Nominal Power consumption of the light system (WL)
		Average illumination of the light on the cooking surface (Emiddle)
		Sound power level at highest setting (Lwa)

## Electrical Connection

<b>Electrical connection rating</b>	272 W
<b>Voltage</b>	220-240 V
<b>Frequency (Hz)</b>	50-60 Hz

<b>Power supply cable length</b>	1500 mm
<b>Plug</b>	Not present

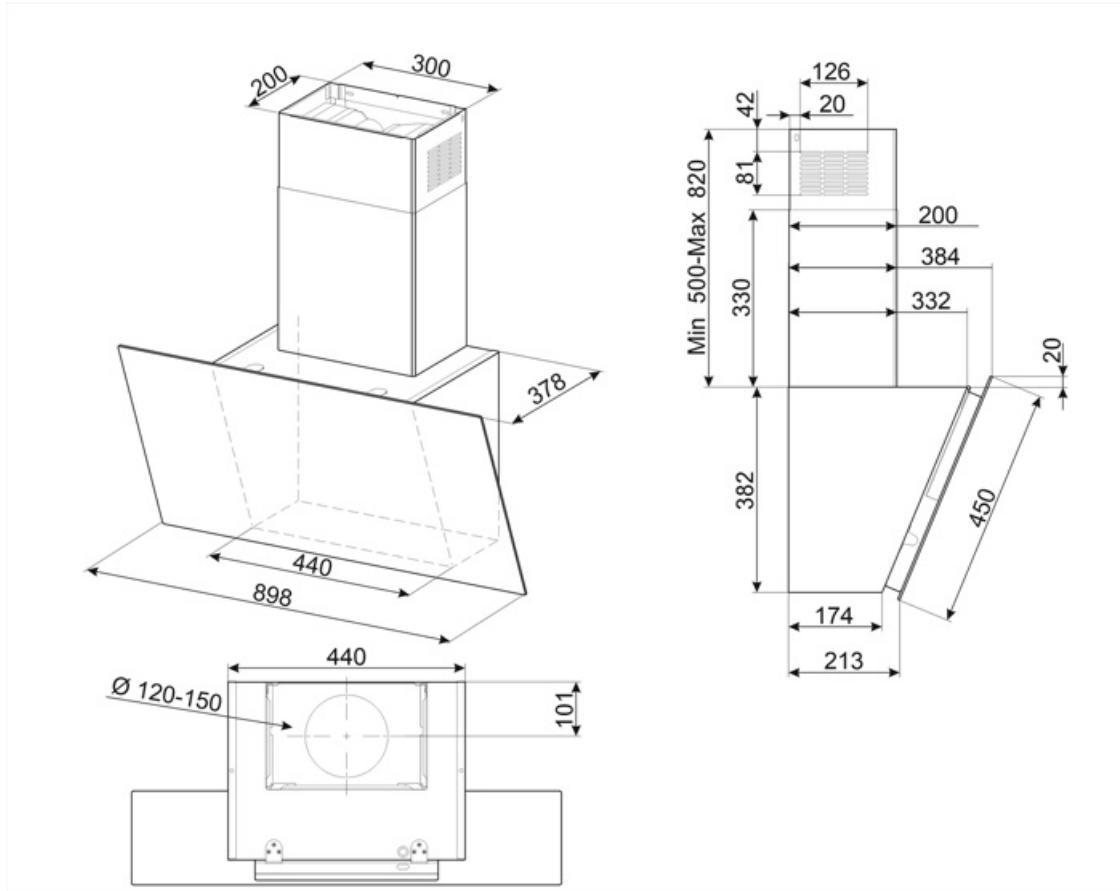

## Compatible Accessories

**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

**KITVENT150**

Motor inlet 150 mm with check valve

**KITFC152**

Charcoal filters Round Kit 2 pieces

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A smart infrared system, which allows a hood and hob with this feature to work together.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.