

KICV90BL2



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709344801
Hood width	90 cm
Aesthetic	Universale
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Embossed






Controls



Control setting	Touch control	Led color	Red
-----------------	---------------	-----------	-----

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent	

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Free outlet maximum capacity	770 m³/h	Minimum distance from GAS hob	450 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	450 mm
No. of filters	2		

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	620	63
Intensive speed	770	68

Accessories included

Tube reduction

Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 43 kWh/a

Energy efficiency class (EEC) A+

Fluid Dynamic Efficiency (FDE) 34.9

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 68 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 45.1 %

Grease Filtering Efficiency Class (GFEC) F

Air flow at minumum speed (Qmin) 300 m³/h

Air flow at maximum speed (Qmax) 620 m³/h

Air flow at boost speed (Qboost) 770 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 48 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 63 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 68 dBA

Time increase factor (F) 0.7

Energy Efficiency Index 40.8

Measured air flow rate at best efficiency point (Qbep) 440 m³/h

Measured air pressure at best efficiency point (Pbep) 468 Pa

Measured electric power input at best efficiency point (Wbep) 164 W

Nominal Power consumption of the light system (WL) 2.2 W


Average illumination of the light on the cooking surface (Emiddle) 150 lux

Sound power level at highest setting (Lwa) 63 dBA

Electrical Connection

Electrical connection rating 272 W
Voltage 220-240 V
Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm
Plug Not present

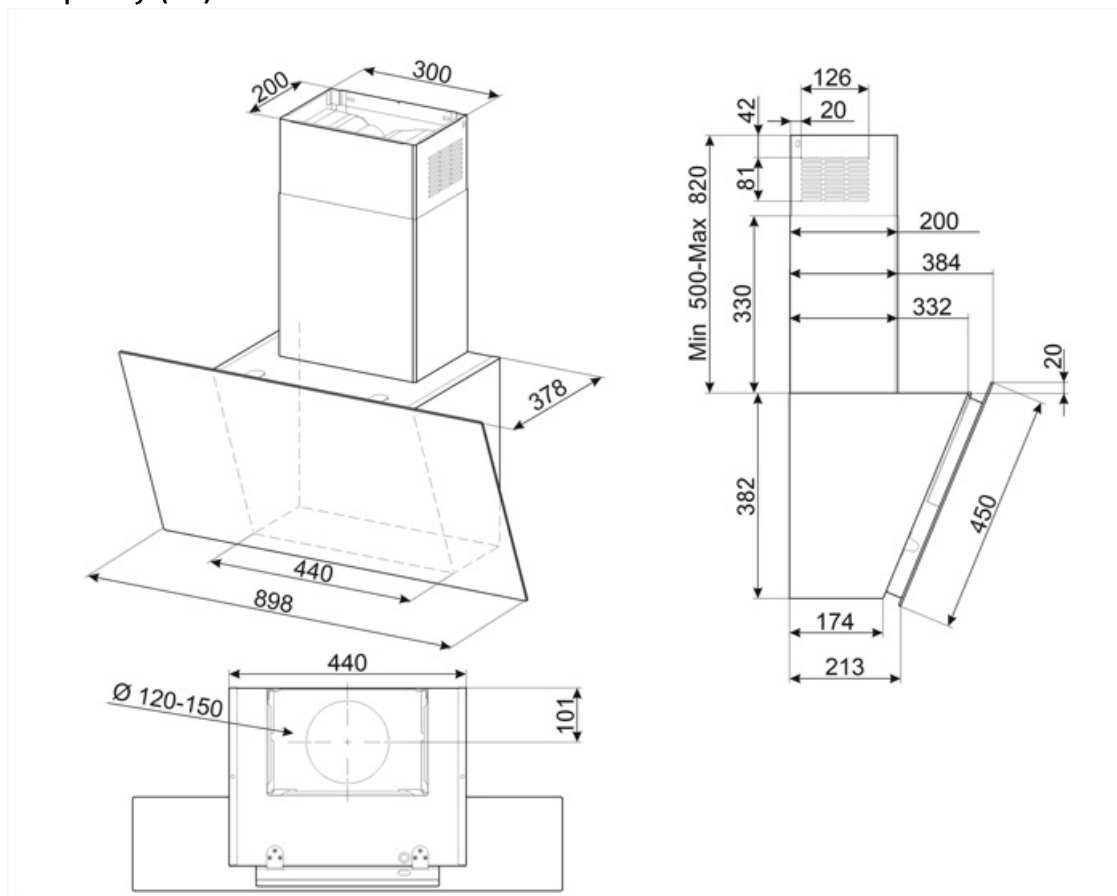

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFC152











Charcoal filters Round Kit 2 pieces



KITVENT150

Motor inlet 150 mm with check valve

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		A smart infrared system, which allows a hood and hob with this feature to work together.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.