

KICV90BL2



Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709344801
Aesthetic	Universal
Colour	Black
Acabamento	Glass
Glass Type	Black
Cor da serigrafia	Serigrafia em cinzento
Logotipo	Logotipo embutido



Controls



Control setting	Touch control	Display	No
Led color	Red		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	

Technical Features



Hood without motor	No	No. of filters	2
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	No		

Free outlet maximum capacity	770 m³/h	Minimum distance from GAS hob	450 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	450 mm
		Non return valve	No

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	310	52
Speed 2	420	56
Speed 3	620	63
Intensive speed	770	68

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	No		

Performance / Energy Label




Consumo anual de energia (CAE exaustor)	43 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Fluid Dynamic Efficiency (FDE)	34,9	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index	40,8
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	440 m³/h
Grease Filtering Efficiency (GFE)	45,1 %	Measured air pressure at best efficiency point (Pbep)	468 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	164 W
Air flow at minumum speed (Qmin)	300 m³/h	Nominal Power consumption of the light system (WL)	2.2 W
Air flow at maximum speed (Qmax)	620 m³/h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Air flow at boost speed (Qboost)	770 m³/h		

Sound power level at
highest setting (Lwa) 63 dBA

Electrical Connection

Plug No
Electrical connection rating 272 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Comprimento do cabo
de alimentação 1500 mm

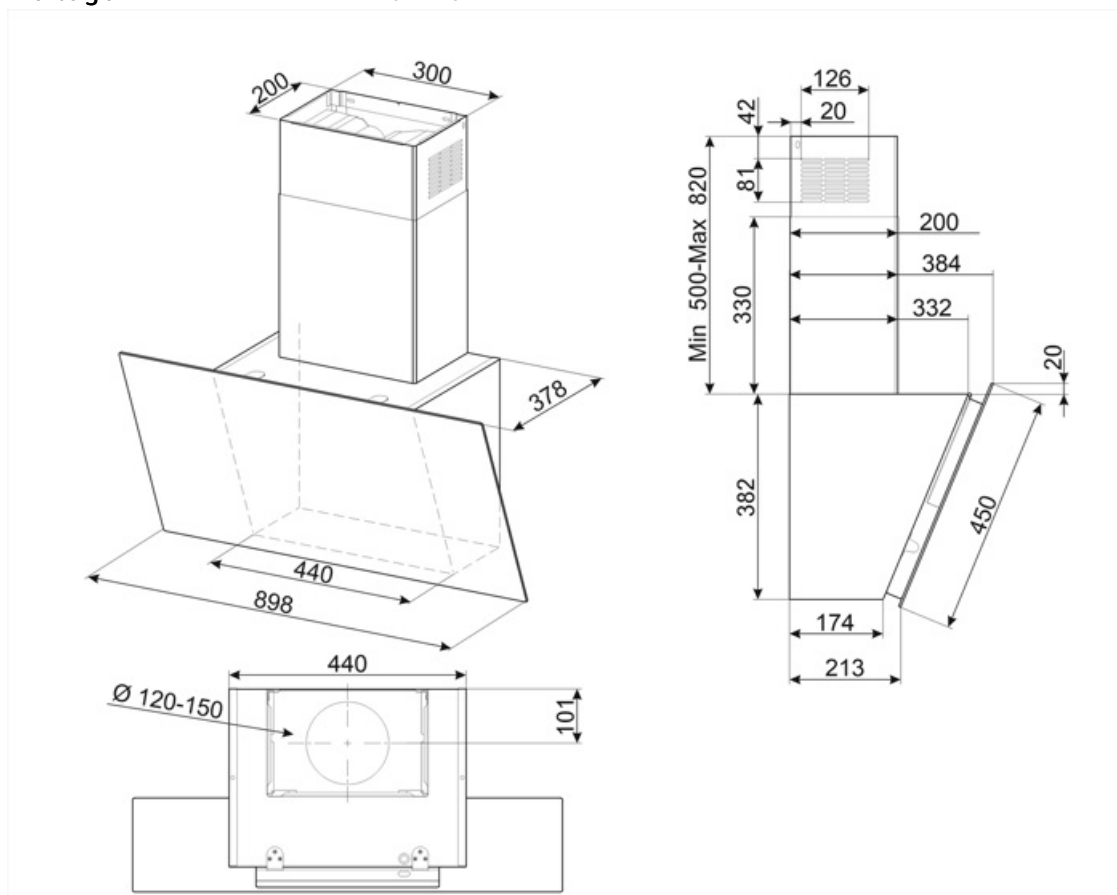

Compatible Accessories



KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos



KITFC152

Filtro de carvão Redondo Kit 2 peças



KITVENT150

Motor entrada 150 mm com válvula de não retorno

Symbols glossary

	24h: Quando seleccionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	Um sistema de infravermelhos inteligente, que permite que um exaustor e uma placa com este recurso trabalhem juntos.		Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.
	A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido.		Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
	Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.		Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.
	Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.		Configuração intensiva/turbo: quando a extração extra rápida é necessária.

Benefit (TT)

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture