KIR37N2



Product family	Hood
Hood Type	Decorative island hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709346096
Hood width	37 cm
Aesthetic	Universale
Colour	Black
Finishing	Satin
Serigraphy colour	Black
Logo	Silk screen

Controls

Control setting	Electronic buttons	**Led color**	White

Program / Functions

No. of speeds	3
Intensive speed	BOOST
Delay function	

Technical Features

No. of lights	2	**No. of filters**	1
Light type	LED	**Anti-grease filters**	Aluminium
Light Power	1 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light color temperature scale (K)	4000 K	**Minimum distance from GAS hob**	550 mm
Free outlet maximum capacity	720 m³/h	**Minimum distance from ELECTRIC hob**	550 mm
Motor power	250 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]

Speed 1	280	48
Speed 2	400	56
Speed 3	570	65
Intensive speed	700	69

Accessories Included

Tube reduction	Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	54 kWh/a
Energy efficicency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	29.6
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	114 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	85.1 %
Grease Filtering Efficiency Class (GFEC)	B
Air flow at minumum speed (Qmin)	280 m³/h
Air flow at maximum speed (Qmax)	570 m³/h
Air flow at boost speed (Qboost)	700 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Time increase factor (F)	0.9
Energy Efficiency Index	51.9
Measured air flow rate at best efficiency point (Qbep)	380 m³/h
Measured air pressure at best efficiency point (Pbep)	448 Pa
Measured electric power input at best efficiency point (Wbep)	160 W
Nominal Power consumption of the light system (WL)	2.2 W
Average illumination of the light on the cooking surface (Emiddle)	250 lux
Sound power level at highest setting (Lwa)	65 dBA

Electrical Connection

Electrical connection rating	252 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz


Power supply cable length	1500 mm
Plug	No

Also available

Alternative colours availible	Stainless steel

Optional accessories

Charcoal filter

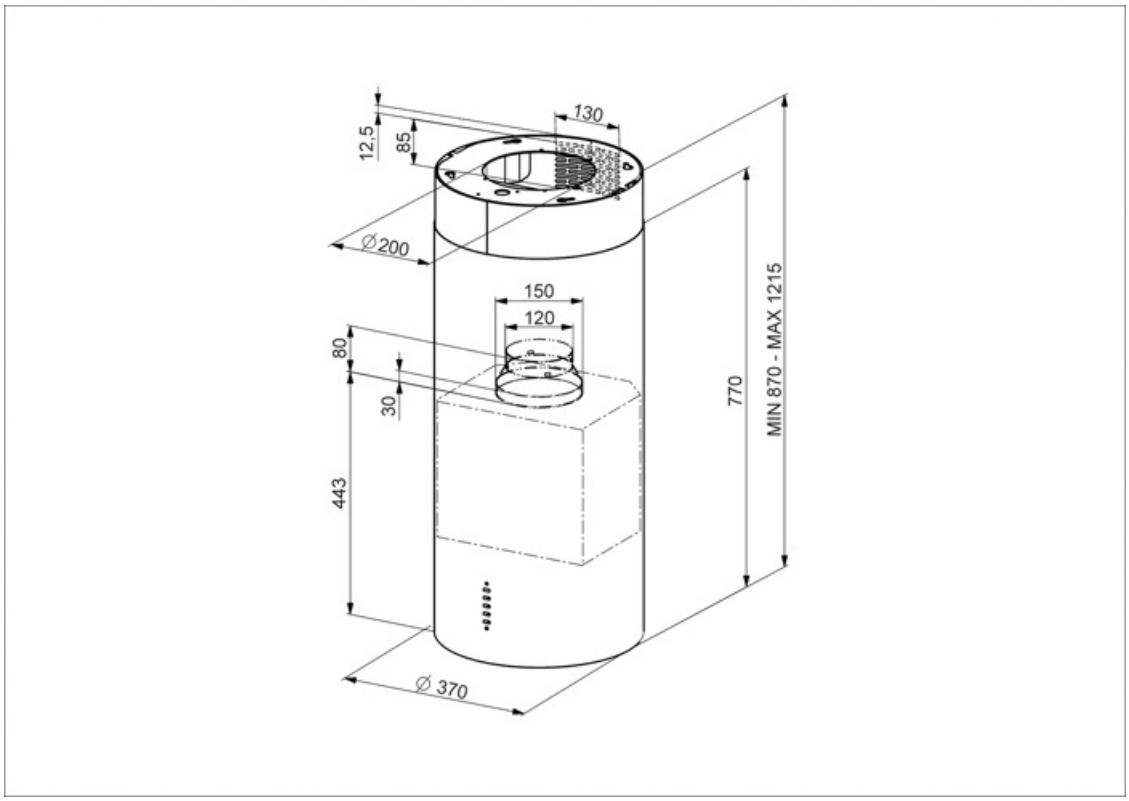

Compatible Accessories



KITFC161

Charcoal filters Kit 1 piece



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary



A: Product drying performance, measured from A+++ to D / G depending on the product family



Delay timer: can be set to run the programme at a convenient time or to take advantage of off-peak energy periods.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Dimmering Lights