

KIR37N2



Product family	Hood
Tipo de Exaustor	Decorative island hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709346096
Aesthetic	Universal
Colour	Black
Acabamento	Satin
Cor da serigrafia	Serigrafia em preto
Logotipo	Logotipo serigrafado



Controls

Control setting	Electronic buttons	Display	No
Led color	White		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	Delay_function
Other options	No

Technical Features



Hood without motor	No	No. of filters	1
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	Yes	Minimum distance from GAS hob	550 mm
Escala de temperatura de cor clara (°K)	4000 °K	Minimum distance from ELECTRIC hob	550 mm
Free outlet maximum capacity	720 m³/h	Non return valve	No
Motor power	250 W		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	48
Speed 2	400	56
Speed 3	570	65
Intensive speed	700	69

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	No		

Performance / Energy Label



Consumo anual de energía (CAE exaustor)	54 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency (FDE)	29,6	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	114 lux/W	Energy Efficiency Index	51,9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	380 m ³ /h
Grease Filtering Efficiency (GFE)	85,1 %	Measured air pressure at best efficiency point (Pbep)	448 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	160 W
Air flow at minumum speed (Qmin)	280 m ³ /h	Nominal Power consumption of the light system (WL)	2.2 W
Air flow at maximum speed (Qmax)	570 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	250 lux
Air flow at boost speed (Qboost)	700 m ³ /h	Sound power level at highest setting (Lwa)	65 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	252 W		

Voltage

220-240 V

Comprimento do cabo
de alimentação


1500 mm

Also available

Outras cores disponíveis Aço inox

Optional accessories

Charcoal filter

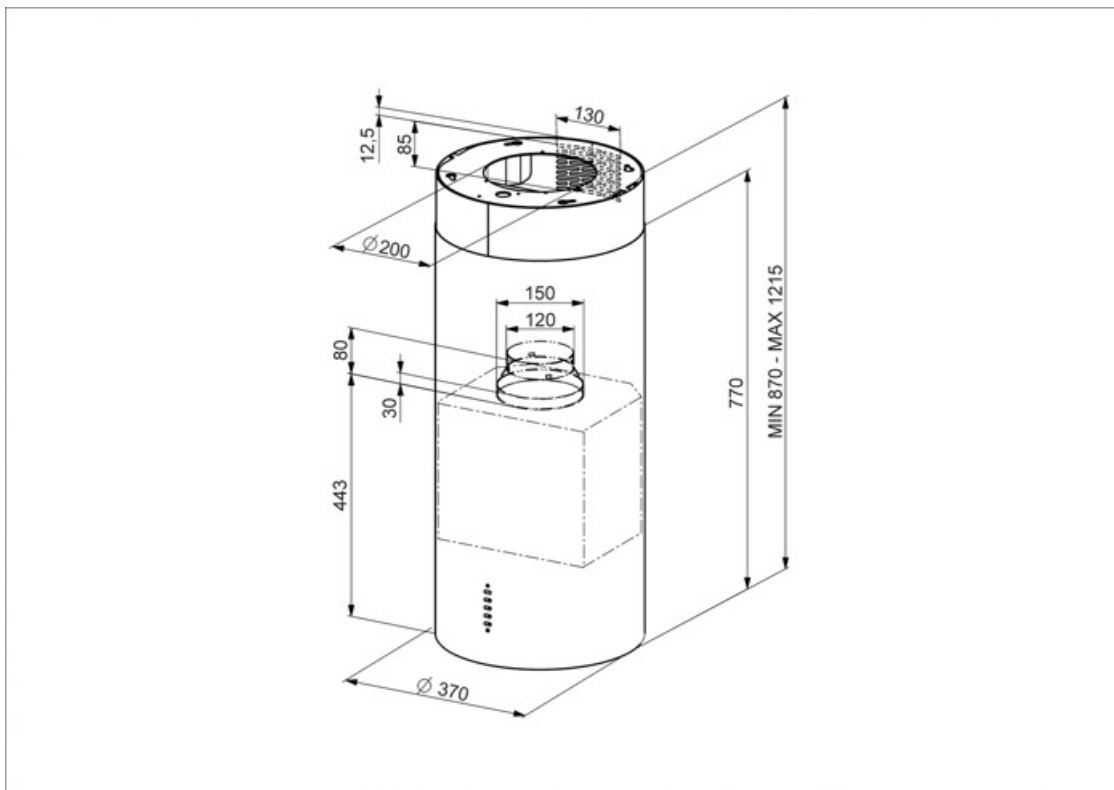

Compatible Accessories



KITFC161








Kit de filtros de carvão 2 peças



KITVENT150

Motor entrada 150 mm com válvula de não retorno

Symbols glossary

-  R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos
-  Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
-  Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.
-  Luzes de escurecimento
-  Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
-  Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.
-  Configuração intensiva/turbo: quando a extração extra rápida é necessária.

Benefit (TT)

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones