

KIR37XE

Product family	Hood
Hood Type	Decorative island hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709203214
Hood width	37 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Serigraphy colour	Black
Logo	Embossed



Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	Yes	Minimum distance from GAS hob	550 mm
Free outlet maximum capacity	800 m ³ /h	Minimum distance from ELECTRIC hob	550 mm
Motor power	270 W	Non return valve	Yes
No. of filters	1		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	52
Speed 2	400	61

Speed 3	560	65
Intensive speed	660	68

Accessories included

Tube reduction	Yes
----------------	-----

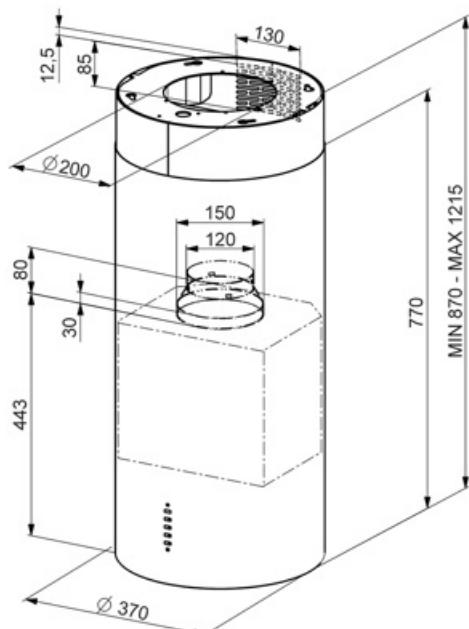
Performance / Energy Label

	
Annual Efficiency Consumption (AEChood)	69 kWh/a
Energy efficiency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	24.6
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	118 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	85.3 %
Grease Filtering Efficiency Class (GFEC)	B
Air flow at minimum speed (Qmin)	280 m³/h
Air flow at maximum speed (Qmax)	560 m³/h
Air flow at boost speed (Qboost)	660 m³/h
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	52 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Time increase factor (F)	1.1
Energy Efficiency Index	51.7
Measured air flow rate at best efficiency point (Qbep)	333 m³/h
Measured air pressure at best efficiency point (Pbep)	447 Pa
Measured electric power input at best efficiency point (Wbep)	168 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	260 lux
Sound power level at highest setting (Lwa)	65 dBA

Electrical Connection

Electrical connection rating	272 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

Optional accessories

Charcoal filter

Compatible Accessories



KITFC161

Charcoal filters Kit 1 piece



KITVENT150

Motor inlet 150 mm with check valve

Symbols glossary

 Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.	 Warning light(s): to advise when filters need changing.
 Dimmering Lights	 Intensive/turbo setting: when extra fast extraction is required.
 Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.	