

# KIR37XE

|                    |                        |
|--------------------|------------------------|
| Product family     | Hood                   |
| Hood Type          | Decorative island hood |
| Design             | Cylindric              |
| Extraction         | Extraction             |
| Electronic control | Yes                    |
| Material           | Stainless steel        |
| Type of steel      | Brushed                |
| EAN code           | 8017709203214          |
| Hood width         | 37 cm                  |



## Aesthetics

|                            |  |                        |                   |
|----------------------------|--|------------------------|-------------------|
| Aesthetic Colour Finishing | Universale<br>Stainless steel<br>Satin | Serigraphy colour Logo | Black<br>Embossed |
|----------------------------|--|------------------------|-------------------|

## Controls

|                 |                    |           |       |
|-----------------|--------------------|-----------|-------|
| Control setting | Electronic buttons | Led color | White |
|-----------------|--------------------|-----------|-------|

## Programs / Functions main oven

|                 |   |
|-----------------|---|
| No. of speeds   | 3   |
| Intensive speed |  |

## Technical Features



|                              |                       |                                    |           |
|------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights                | 2                     | Anti-grease filters                | Aluminium |
| Light type                   | LED                   | Filter replacement indicator       | Yes       |
| Light Power                  | 1 W                   | Vent outlet                        | 150 mm    |
| Dimmer mode                  | Yes                   | Minimum distance from GAS hob      | 550 mm    |
| Free outlet maximum capacity | 800 m <sup>3</sup> /h | Minimum distance from ELECTRIC hob | 550 mm    |
| Motor power                  | 270 W                 | Non return valve                   | Yes       |
| No. of filters               | 1                     |                                    |           |

|                 | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1         | 280   | 52                               |
| Speed 2         | 400   | 61                               |
| Speed 3         | 560   | 65                               |
| Intensive speed | 660   | 68                               |

## Accessories Included

Tube reduction Yes


## Performance / Energy Label



|   |                       |  |                       |
|---|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood)   | 69 kWh/a              | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 65 dBA                |
| Energy efficiency class (EEC)   | B                     | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 68 dBA                |
| Fluid Dynamic Efficiency (FDE)  | 24,6                  | Power Consumption in Off mode (Po)   | 0,49 W                |
| Fluid Dynamic Efficiency class (FDEC)   | B                     | Time increase factor (F)   | 1,1                   |
| Lighting Efficiency (LE)  | 118 lux/W             | Energy Efficiency Index  | 51,7                  |
| Lighting Efficiency Class (LEC)   | A                     | Measured air flow rate at best efficiency point (Qbep)                         | 333 m <sup>3</sup> /h |
| Grease Filtering Efficiency (GFE)   | 85,3 %                | Measured air pressure at best efficiency point (Pbep)                          | 447 Pa                |
| Grease Filtering Efficiency Class (GFEC)  | B                     | Measured electric power input at best efficiency point (Wbep)                  | 168 W                 |
| Air flow at minumum speed (Qmin)  | 280 m <sup>3</sup> /h | Nominal Power consumption of the light system (WL)                             | 2 W                   |
| Air flow at maximum speed (Qmax)  | 560 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 260 lux               |
| Air flow at boost speed (Qboost)  | 660 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 65 dBA                |
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 52 dBA                |  |                       |

## Electrical Connection

|                              |             |                           |          |
|------------------------------|-------------|---------------------------|----------|
| Plug                         | Not present | Frequency (Hz)            | 50-60 Hz |
| Electrical connection rating | 272 W       | Power supply cable length | 1500 mm  |
| Voltage                      | 220-240 V   |                           |          |

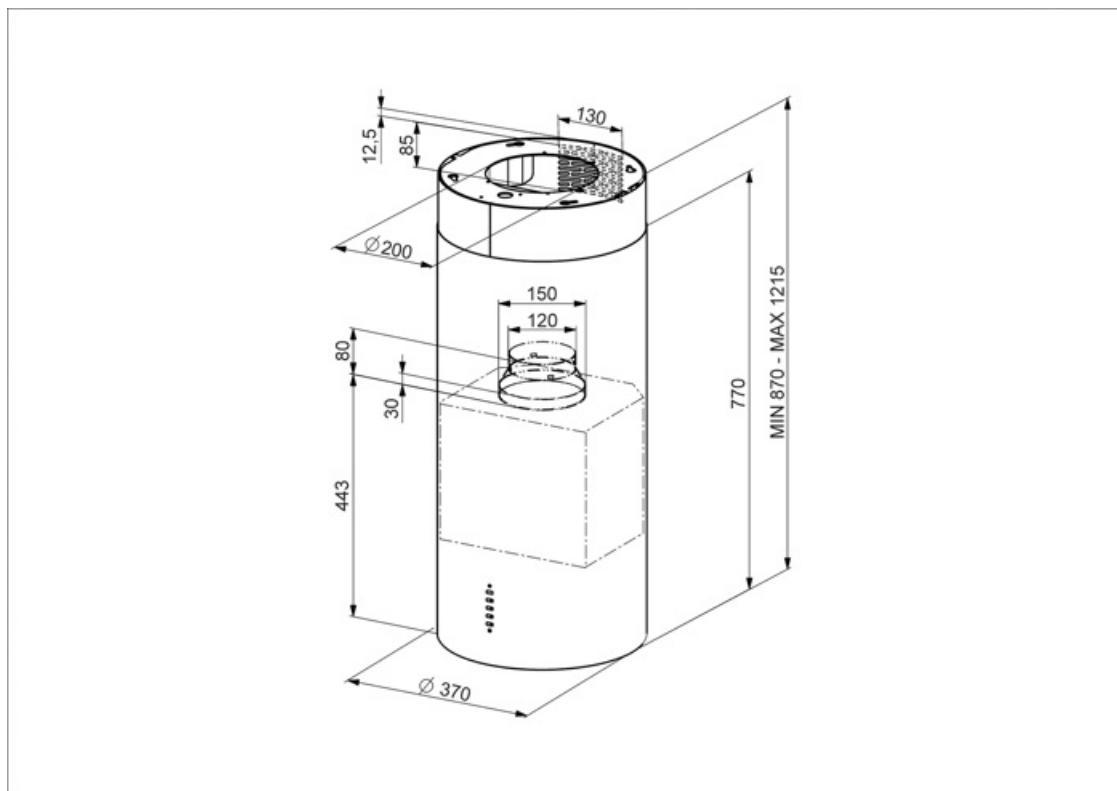

---

## Not included accessories

---



**KITFC161**

Charcoal filters Kit 1 pieces









**KITVENT150**

Imbocco motore 150 mm con valvola di non ritorno

---

## Symbols glossary (TT)

---

- |  |   |   |  |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |  |  |
|  | Dimmering Lights  |  | Warning light(s): to advise when filters need changing.          |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Intensive/turbo setting: when extra fast extraction is required. |