

# KIR37XE


Product family	Hood
Tipo de Exaustor	Decorative island hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709203214
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Cor da serigrafia	Serigrafia em preto
Logotipo	Logotipo embutido



## Controls

Control setting	Electronic buttons	Display	No
Led color	White		

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No
Ventilação automática	No

## Technical Features



Hood without motor	No	No. of filters	1
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	Yes	Minimum distance from GAS hob	550 mm
Free outlet maximum capacity	800 m <sup>3</sup> /h		
Motor power	270 W		

Minimum distance from ELECTRIC hob 550 mm  
Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	52
Speed 2	400	61
Speed 3	560	65
Intensive speed	660	68

## Accessories Included

Remote control No  
Sliding door No  
Tube reduction Yes

## Performance / Energy Label




Consumo anual de energía (CAE exaustor)	69 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency (FDE)	24.6	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1.1
Lighting Efficiency (LE)	118 lux/W	Energy Efficiency Index	51.7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	333 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	85.3 %	Measured air pressure at best efficiency point (Pbep)	447 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	168 W
Air flow at minumum speed (Qmin)	280 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	560 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	260 lux
Air flow at boost speed (Qboost)	660 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	65 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	52 dBA		

## Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	272 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

## Optional accessories

### Charcoal filter

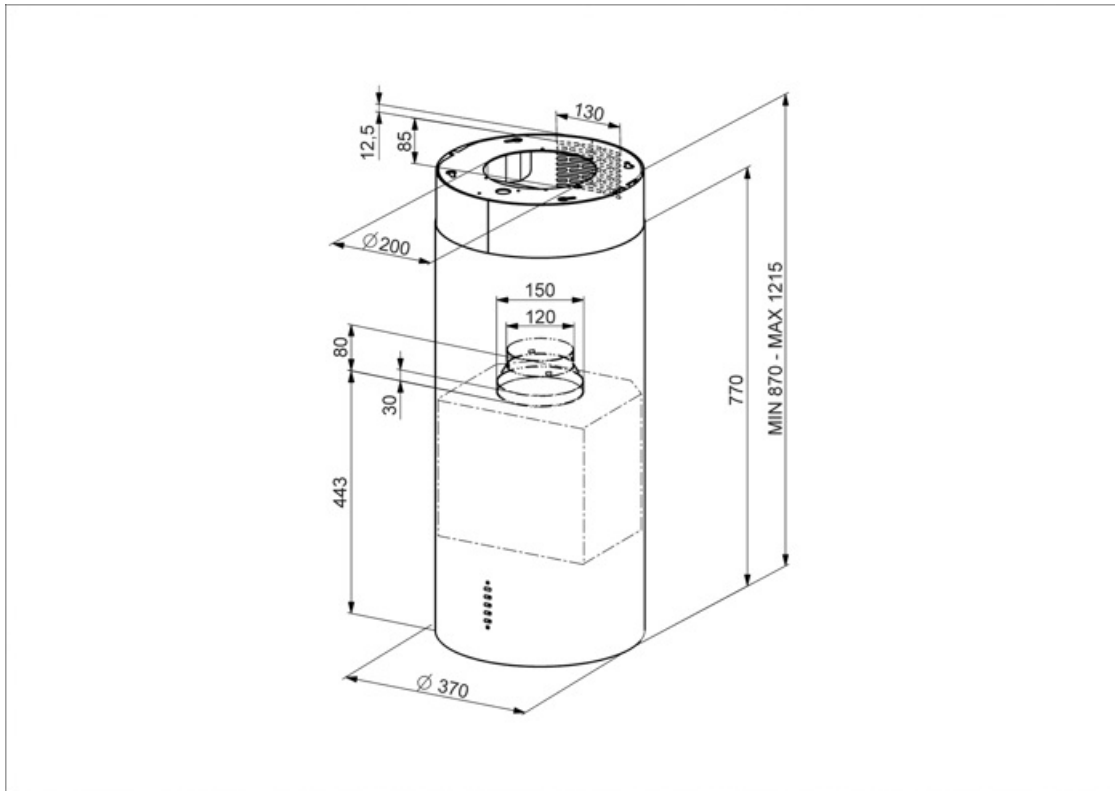

---

## Compatible Accessories

---



### **KITFC161**

Kit de filtros de carvão 2 peças



### **KITVENT150**

Motor entrada 150 mm com válvula de não retorno

---

## Symbols glossary

---



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.



Luzes de escurecimento

