KIR37XE2



Product family	Hood
Hood Type	Decorative island hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709346089
Hood width	37 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Serigraphy colour	Black
Logo	Embossed

Controls

Control setting	Electronic buttons	**Led color**	White

Program / Functions

No. of speeds	3
Intensive speed	BOOST
Delay function	

Technical Features

No. of lights	2	**No. of filters**	1
Light type	LED	**Anti-grease filters**	Aluminium
Light Power	1 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light color temperature scale (K)	4000 K	**Minimum distance from GAS hob**	550 mm
Free outlet maximum capacity	720 m³/h	**Minimum distance from ELECTRIC hob**	550 mm
Motor power	250 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]

Speed 1	280	48
Speed 2	400	56
Speed 3	570	65
Intensive speed	700	69

Accessories Included

Tube reduction	Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	54 kWh/a
Energy efficicency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	29,6
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	114 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	85,1 %
Grease Filtering Efficiency Class (GFEC)	B
Air flow at minumum speed (Qmin)	280 m³/h
Air flow at maximum speed (Qmax)	570 m³/h
Air flow at boost speed (Qboost)	700 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Time increase factor (F)	0,9
Energy Efficiency Index	51,9
Measured air flow rate at best efficiency point (Qbep)	380 m³/h
Measured air pressure at best efficiency point (Pbep)	448 Pa
Measured electric power input at best efficiency point (Wbep)	160 W
Nominal Power consumption of the light system (WL)	2,2 W
Average illumination of the light on the cooking surface (Emiddle)	250 lux
Sound power level at highest setting (Lwa)	65 dBA

Electrical Connection

Electrical connection rating	252 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz


Power supply cable length	1500 mm
Plug	No

Also available

Alternative colours availible	Black

Optional accessories

Charcoal filter

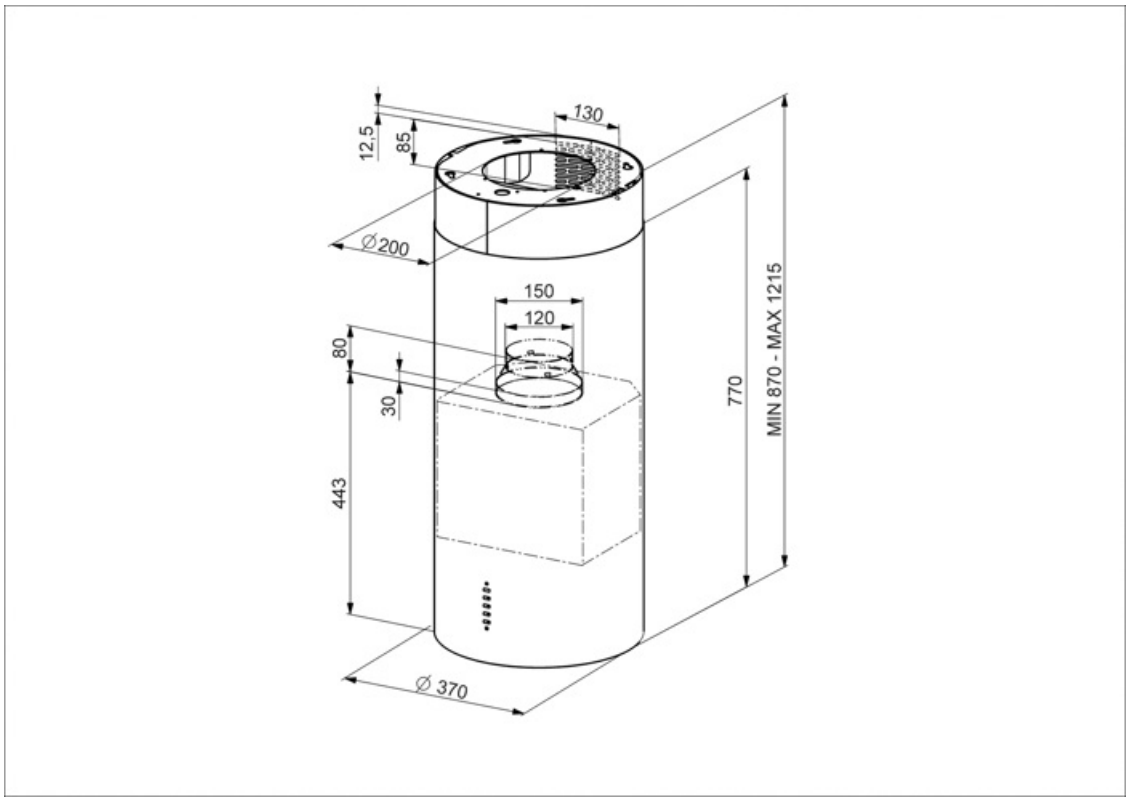

Compatible Accessories



KITFC161

Charcoal filters Kit 1 piece



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Delay timer: can be set to run the programme at a convenient time or to take advantage of off-peak energy periods.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Dimmering Lights



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.