

# KL175XE



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709204020
Hood width	75 cm



## Aesthetics

Aesthetic	Linea	Finishing	Satin
Colour	Stainless steel	Logo	Embossed

## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Programme / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

			
No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	480 mm
Free outlet maximum capacity	825 m³/h	Minimum distance from ELECTRIC hob	480 mm
Motor power	275 W		

No. of filters 2 Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	304	54
Speed 2	395	58
Speed 3	525	65
Intensive speed	782	71


## Performance / Energy Label

8

Annual Efficiency Consumption (AEChood)	59 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dB(A)
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dB(A)
Fluid Dynamic Efficiency (FDE)	28.7	Power consumption in stand-by mode (Ps)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1.00
Lighting Efficiency (LE)	101.8 lux/W	Energy Efficiency Index	55.6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	372 m³/h
Grease Filtering Efficiency (GFE)	59.6 %	Measured air pressure at best efficiency point (Pbep)	454 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	163 W
Air flow at minumum speed (Qmin)	304 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	525 m³/h	Average illumination of the light on the cooking surface (Emiddle)	224 lux
Air flow at boost speed (Qboost)	783 m³/h	Sound power level at highest setting (Lwa)	65 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dB(A)		

## Electrical Connection

Electrical connection rating	278 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

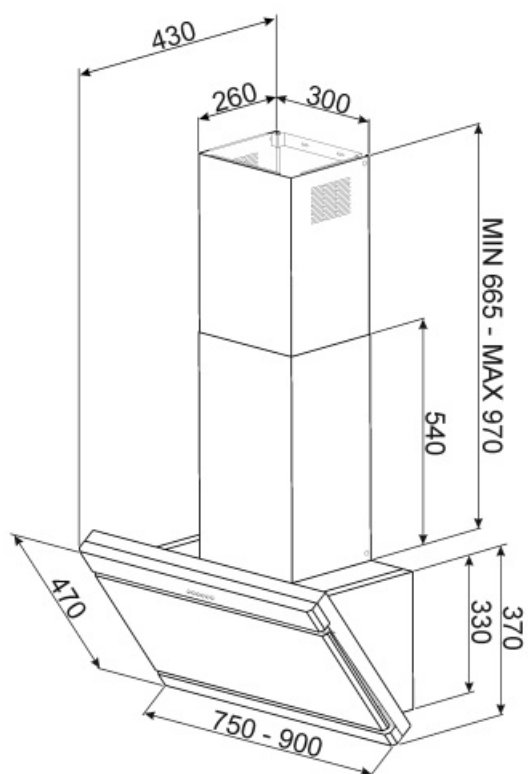

---

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.