


# KLT120LWHS



Product family	Hood
Hood Type	Ceiling
Design	Ceiling
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709291310
Hood width	120 cm



## Aesthetics

Aesthetics	Universal	Finishing	White
Colour	Matt White	Logo	Silk screen

## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programs / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	2	No. of filters	4
Light type	LED	Anti-grease filters	Aluminium
Light power	7.4 W	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Light color temperature range	3000° - 5700° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	610 m <sup>3</sup> /h	Non return valve	Yes

Motor power 270 W

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	196	57
Speed 2	313	55
Speed 3	443	62
Intensive speed	597	69

## Accessories Included

Remote control Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	109 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	61 dB(A)
Energy efficiency class (EEC)	C	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dB(A)
Fluid Dynamic Efficiency (FDE)	25.5	Power consumption in stand-by mode (Ps)	0.38 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1.1
Lighting Efficiency (LE)	14.2 lux/W	Energy Efficiency Index per first cavity	70.3
Lighting Efficiency Class (LEC)	D	Measured air flow rate at best efficiency point (Qbep)	349 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	63.5 %	Measured air pressure at best efficiency point (Qbep)	613 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	233 W
Air flow at minumum speed (Qmin)	196 m <sup>3</sup> /h	Normal Power of the light system (WI)	21 W
Maximum extraction rate	443 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	301 lux
Intensive extraction rate	597 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	62 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	56 dB(A)		

## Electrical Connection


Nominal power 2845 W Frequency (Hz) 50-60 Hz

Voltage

220-240 V


Power supply cable  
length

1500 mm

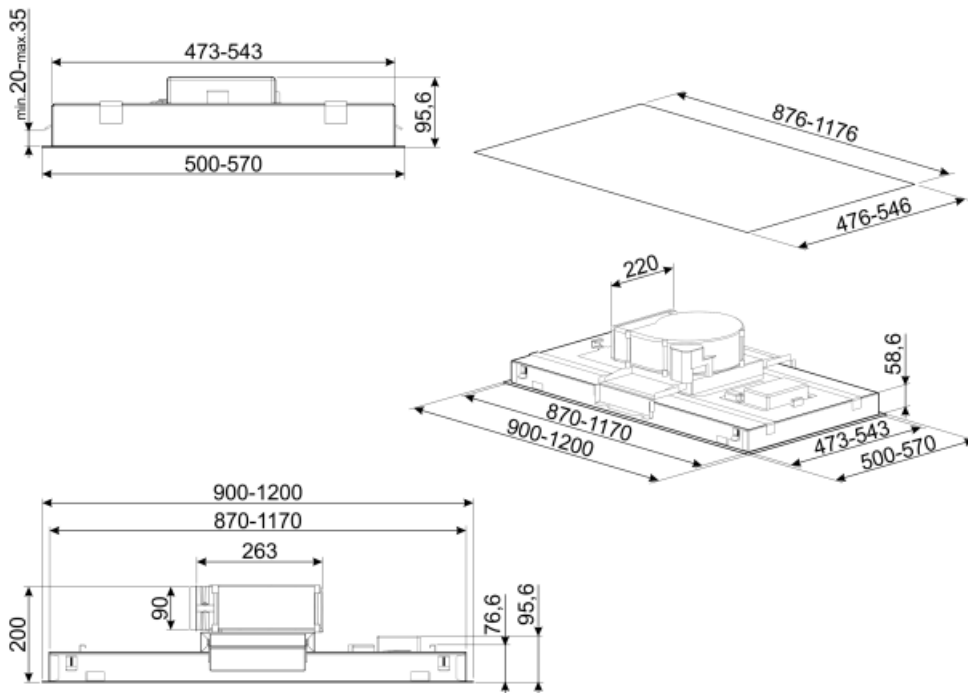

## Not included accessories

---



### KITFCKLTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KLT\* models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H) x 200 (L) x 10 (D) mm



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes









### RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

---

## Symbols glossary

---

- |  |   |   |  |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |  | C: Product energy rating   |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction. |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | ...  |