


KLT120LWHS



Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709291310
Aesthetic	Universale
Colour	Matt White
Finishing	White
Logo	Silk screen



Controls

Control setting	Electronic buttons
-----------------	--------------------

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features



No. of lights	2	No. of filters	4
Light type	LED	Anti-grease filters	Aluminium
Light Power	7.4 W	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Light color temperature range	3000° - 5700° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	610 m³/h	Non return valve	Yes
Motor power	270 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	196	57
Speed 2	313	55

Speed 3	443	62
Intensive speed	597	69

Accessories included

Remote control	Yes
----------------	-----

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	109 kWh/a
Energy efficiency class (EEC)	C
Fluid Dynamic Efficiency (FDE)	25.5
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	14.2 lux/W
Lighting Efficiency Class (LEC)	D
Grease Filtering Efficiency (GFE)	63.5 %
Grease Filtering Efficiency Class (GFEC)	E
Air flow at minumum speed (Qmin)	196 m³/h
Air flow at maximum speed (Qmax)	443 m³/h
Air flow at boost speed (Qboost)	597 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	56 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	61 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Time increase factor (F)	1.1
Energy Efficiency Index	70.3
Measured air flow rate at best efficiency point (Qbep)	349 m³/h
Measured air pressure at best efficiency point (Pbep)	613 Pa
Measured electric power input at best efficiency point (Wbep)	233 W
Nominal Power consumption of the light system (WL)	21 W
Average illumination of the light on the cooking surface (Emiddle)	301 lux
Sound power level at highest setting (Lwa)	62 dBA

Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	2845 W	Power supply cable length	1500 mm
Voltage	220-240 V		

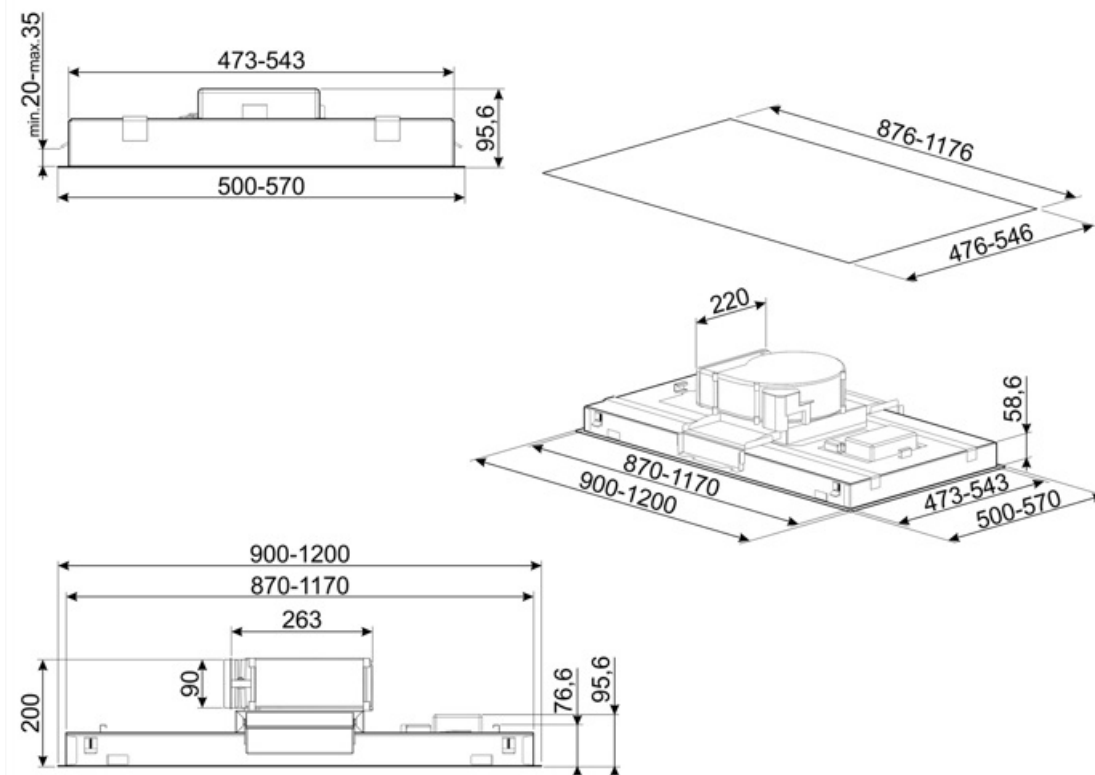


Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H) x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Tunable white from warm to cold

Benefit (TT)

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones