

KLT120LWHS



Product family Hood

Hood TypeCeiling hoodDesignCeilingExtractionExtractionElectronic controlYes

Perimeter extraction Yes

MaterialStainless steelType of steelBrushed

EAN code 8017709291310

Hood width 120 cm

Aesthetic Universale

Colour Matt White

Finishing White

Logo Silk screen



Controls

Control setting Electronic buttons

Program / Functions

No. of speeds Intensive speed



Technical Features





capacity



No. of lights 2 No. of filters 4

Light typeLEDAnti-grease filtersAluminiumLight Power7,4 WVent outlet150 mmLight color temperature3000 KMinimum distance from650 mm

scale (K) GAS hob

Light color temperature 3000 - 5700 K Minimum distance from 650 mm

range ELECTRIC hob

Free outlet maximum 610 m³/h Non return valve Yes

Motor power 270 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	196	57
Speed 2	313	55



Speed 3	443	62
Intensive speed	597	69

Accessories included

Remote control Yes

Performance / Energy Label

C f

Annual Efficiency 109 kWh/a Consumption (AEChood) Energy efficieency class C (EEC) Fluid Dynamic Efficiency 25,5 (FDE)

Fluid Dynamic Efficiency B class (FDEC)

Lighting Efficiency (LE) 14,2 lux/W

63,5 %

Lighting Efficiency Class D (LEC)

Grease Filtering Efficiency (GFE)

Grease Filtering

Efficiency Class (GFEC)

Air flow at minumum 196 m³/h

speed (Qmin)

Air flow at maximum 443 m³/h

speed (Qmax)

Air flow at boost speed 597 m³/h

(Qboost)

Airbourne acouistical A- 56 dBA weighted sound Power

Emission at minimum speed (SPEmin)

Airborne acoustical A-61 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Airbourne acoustical A- 68 dBA weighted sound power

emission at boost speed (SPEboost)

Time increase factor (F) **Energy Efficiency Index** 70.3 Measured air flow rate 349 m³/h

at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

(Pbep)

Measured electric 233 W power input at best

efficiency point (Wbep)

Nominal Power consumption of the light

system (WL)

Average illumination of the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa) 301 lux

21 W

613 Pa

62 dBA

1500 mm

Electrical Connection

Electrical connection 2845 W

rating


Voltage 220-240 V Frequency (Hz) 50-60 Hz

Power supply cable

length

Plug Not present



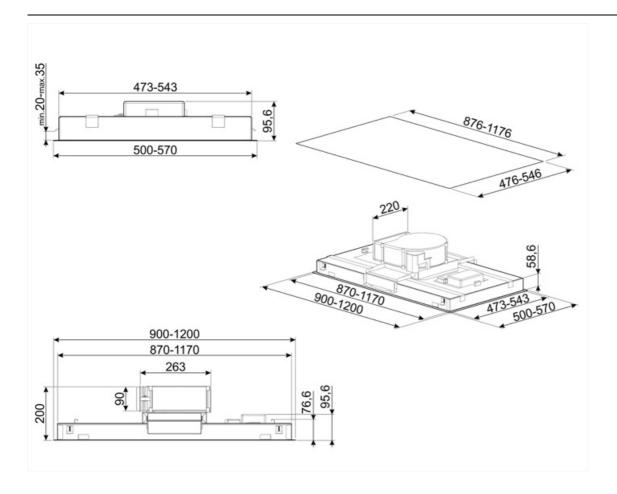



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 \emptyset



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Tunable white from warm to cold