

# KLT120LXS



Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709291303
Hood width	120 cm



## Aesthetics

Aesthetic Colour	Universale Stainless steel	Finishing Logo	Satin Silk screen
------------------	-------------------------------	----------------	----------------------

## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programme / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	2	No. of filters	4
Light type	LED	Anti-grease filters	Aluminium
Light Power	7.4 W	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Light color temperature range	3000° - 5700° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	610 m <sup>3</sup> /h	Non return valve	Yes

Motor power 270 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	196	57
Speed 2	313	55
Speed 3	443	62
Intensive speed	597	69

## Accessories Included

Remote control Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	109 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	61 dB(A)
Energy efficiency class (EEC)	C	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dB(A)
Fluid Dynamic Efficiency (FDE)	25.5	Power consumption in stand-by mode (Ps)	0.38 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1.1
Lighting Efficiency (LE)	14.2 lux/W	Energy Efficiency Index	70.3
Lighting Efficiency Class (LEC)	D	Measured air flow rate at best efficiency point (Qbep)	349 m³/h
Grease Filtering Efficiency (GFE)	63.5 %	Measured air pressure at best efficiency point (Pbep)	613 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	233 W
Air flow at minumum speed (Qmin)	196 m³/h	Nominal Power consumption of the light system (WL)	21 W
Air flow at maximum speed (Qmax)	443 m³/h	Average illumination of the light on the cooking surface (Emiddle)	301 lux
Air flow at boost speed (Qboost)	597 m³/h	Sound power level at highest setting (Lwa)	62 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	56 dB(A)		


## Electrical Connection

Frequency (Hz) 50-60 Hz

Electrical connection rating 285 W


Power supply cable length 1500 mm

Voltage 220-240 V

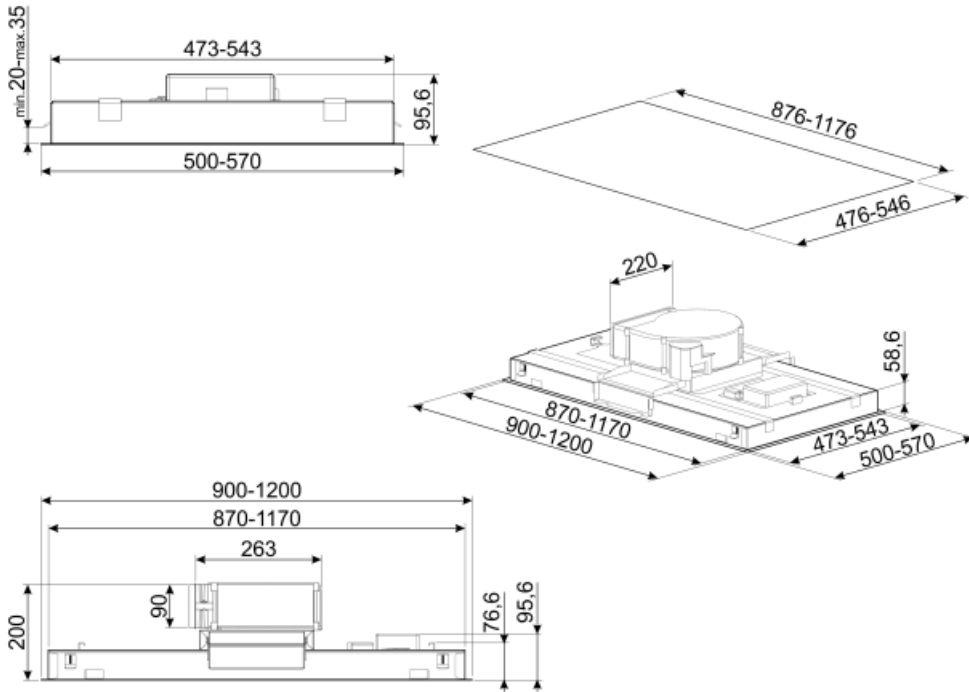

## Not included accessories

---



### KITFCKLTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KLT\* models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H) x 200 (L) x 10 (D) mm



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes









### RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

---

## Symbols glossary (TT)

---

- |  |   |   |  |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |  | C: Product energy rating   |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction. |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | Tunable white from warm to cold                                      |