

# KLT12L4WH



**Product family** Hood

**Hood Type** Ceiling Cooker Hoods

Design Ceiling

Extraction Ducted out or re-circulation possible

**Electronic control** Yes Yes Perimeter extraction

Material Stainless steel Type of steel Brushed

**EAN** code 8017709326197

Hood width 120 cm **Aesthetics** Universal Colour Matte White **Finishing** Brushed Silk screen Logo



### **Controls**

Control setting Touch control back-lighted

White

3000 - 5700 K

610 m<sup>3</sup>/h

## **Program / Functions**

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-Vent 2.0









### **Technical Features**









No. of lights 2 Light type **LED** Light power 7,4 W

temperature range

Free outlet maximum

capacity

Light colour

Motor power 270 W No. of filters 4

Anti-grease filters

Filter replacement

indicator Vent outlet

Minimum distance from

GAS hob

Minimum distance from

**ELECTRIC hob** 

Non return valve

Aluminium

Yes

150 mm

650 mm

650 mm

Yes

**SMEG SPA** 12/12/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	194	51
Speed 2	315	57
Speed 3	447	65
Intensive speed	591	71

#### Accessories Included

Remote control Yes

### Performance / Energy Label

B t **Annual Efficiency** Airbourne acouistical A- 51 dBA 91 kWh/year Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficiency class ( B speed (SPEmin) Airborne acoustical A-Fluid Dynamic Efficiency 27,1 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Lighting Efficiency (LE) 20,1 lux/W weighted sound power Lighting Efficiency Class B (LEC) (SPEboost) **Grease Filtering** 62,7 % Efficiency (GFE) **Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate Air flow at minumum 194 m<sup>3</sup>/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 447 m<sup>3</sup>/h Measured air pressure rate at best efficiency point Intensive extraction rate 591 m<sup>3</sup>/h (Qbep) Measured electric power input at best

Airbourne acoustical A- 71 dBA emission at boost speed Time increase factor (F) 1,0 **Energy Efficiency Index** 339,3 m<sup>3</sup>/h 632 Pa 219.5 W efficiency point (Wbep) Normal Power of the 14.8 W light system (WI) Average illumination of 298 lux the light on the cooking surface (Emiddle) Sound power level at 66 dBA

highest setting (Lwa)


66 dBA

### **Electrical Connection**

Nominal power 305 W Frequency (Hz) 50-60 Hz

**SMEG SPA** 12/12/2025



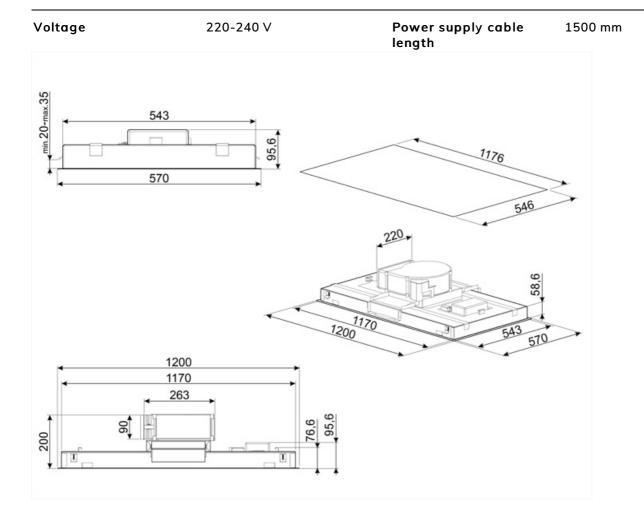

SMEG SPA 12/12/2025



## **Compatible Accessories**



#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



#### **KITFCKLTR**

1 pcs of Charcoal filter Regenerable\* suitable for all the KLT\* models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H )x 200 (L) x 10 (D) mm



#### RRA90

Round to rectangular adapter 220x90 mm to 150  $\emptyset$ 

SMEG SPA 12/12/2025



## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



...



SMEG SPA 12/12/2025