

KLT12L4WH



Product family Hood **Hood Type** Ceiling hood Design Ceiling Extraction Extraction **Electronic control** Yes Yes Perimeter extraction

Material Stainless steel Type of steel Brushed

EAN code 8017709326197

Hood width 120 cm **Aesthetic** Universale Colour Matt White **Finishing** Satin Silk screen Logo



Controls

Control setting Touch control back-lighted

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









Technical Features









No. of lights Light type **LED Light Power** 7,4 W

Light color temperature 3000 - 5700 K

610 m³/h

range

Free outlet maximum

capacity

Motor power 270 W No. of filters 4

Anti-grease filters

Filter replacement

indicator Vent outlet

Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

Aluminium

Yes

150 mm 650 mm

650 mm

Yes

SMEG SPA 27/11/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	194	51
Speed 2	315	57
Speed 3	447	65
Intensive speed	591	71

Accessories included

Remote control Yes

Performance / Energy Label

_	tr-
<	Ť
	Ď

Annual Efficiency 91 kWh/a Consumption (AEChood) Energy efficieency class B Fluid Dynamic Efficiency 27,1 (FDE) Fluid Dynamic Efficiency B class (FDEC) Lighting Efficiency (LE) 20,1 lux/W Lighting Efficiency Class B (LEC) **Grease Filtering** 62,7 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 194 m³/h speed (Qmin) Air flow at maximum 447 m³/h speed (Qmax) Air flow at boost speed 591 m³/h (Qboost)

weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-66 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 1,0 **Energy Efficiency Index** 63.0 Measured air flow rate 339,3 m³/h at best efficiency point (Qbep) Measured air pressure 632 Pa at best efficiency point (Pbep) Measured electric 219.5 W power input at best efficiency point (Wbep) 14,8 W **Nominal Power** consumption of the light system (WL) Average illumination of 298 lux the light on the cooking surface (Emiddle) Sound power level at 66 dBA

highest setting (Lwa)

Airbourne acouistical A- 51 dBA


Electrical Connection

SMEG SPA 27/11/2025



Electrical connection 305 W Power supply cable 1500 mm rating length

Voltage 220-240 V Plug Not present

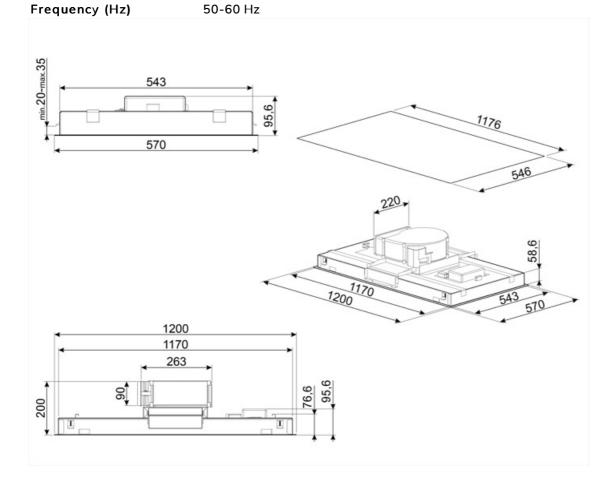

SMEG SPA 27/11/2025



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 \emptyset

SMEG SPA 27/11/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Tunable white from warm to cold



SMEG SPA 27/11/2025