


KLT12L4X





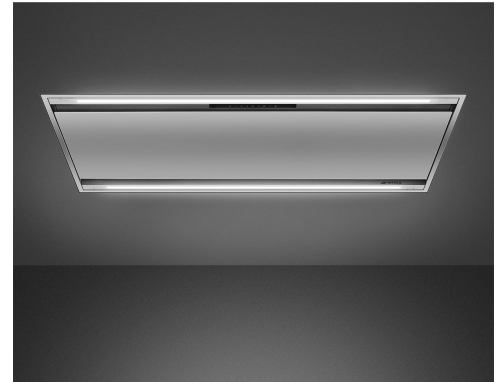

| | |
|----------------------|---------------------------------------|
| Product family | Hood |
| Hood Type | Ceiling Cooker Hoods |
| Design | Ceiling |
| Extraction | Ducted out or re-circulation possible |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709326203 |
| Hood width | 120 cm |
| Aesthetics | Universal |
| Colour | Stainless steel |
| Finishing | Brushed |
| Logo | Silk screen |



Controls

| | |
|-----------------|-------------------------------------|
| Control setting | Touch control back-lighted White |
|-----------------|-------------------------------------|

Program / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |
| Auto-Vent 2.0 |  |

Technical Features



| | | | |
|--------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 2 | No. of filters | 4 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light power | 7.4 W | Filter replacement indicator | Yes |
| Dimmer mode | Yes | Vent outlet | 150 mm |
| Light colour temperature range | 3000 - 5700 K | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 610 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 270 W | Non return valve | Yes |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 194 | 51 |
| Speed 2 | 315 | 57 |
| Speed 3 | 447 | 65 |
| Intensive speed | 591 | 71 |

Accessories Included

Remote control Yes

Performance / Energy Label




| | | | |
|--|-----------------------|--|-------------------------|
| Annual Efficiency Consumption (AEChood) | 91 kWh/year | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 51 dBA |
| Energy efficiency class (EEC) | B | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 66 dBA |
| Fluid Dynamic Efficiency (FDE) | 27.1 | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA |
| Fluid Dynamic Efficiency class (FDEC) | B | Time increase factor (F) | 1.0 |
| Lighting Efficiency (LE) | 20.1 lux/W | Energy Efficiency Index per first cavity | 63.0 |
| Lighting Efficiency Class (LEC) | B | Measured air flow rate at best efficiency point (Qbep) | 339.3 m ³ /h |
| Grease Filtering Efficiency (GFE) | 62.7 % | Measured air pressure at best efficiency point (Qbep) | 632 Pa |
| Grease Filtering Efficiency Class (GFEC) | E | Measured electric power input at best efficiency point (Wbep) | 219.5 W |
| Air flow at minumum speed (Qmin) | 194 m ³ /h | Normal Power of the light system (WI) | 14.8 W |
| Maximum extraction rate | 447 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 298 lux |
| Intensive extraction rate | 591 m ³ /h | Sound power level at highest setting (Lwa) | 66 dBA |

Electrical Connection

| | | | |
|---------------|-------|---------------------------|---------|
| Nominal power | 305 W | Power supply cable length | 1500 mm |
|---------------|-------|---------------------------|---------|

| | | | |
|----------------|-----------|------|----|
| Voltage | 220-240 V | Plug | No |
| Frequency (Hz) | 50-60 Hz | | |

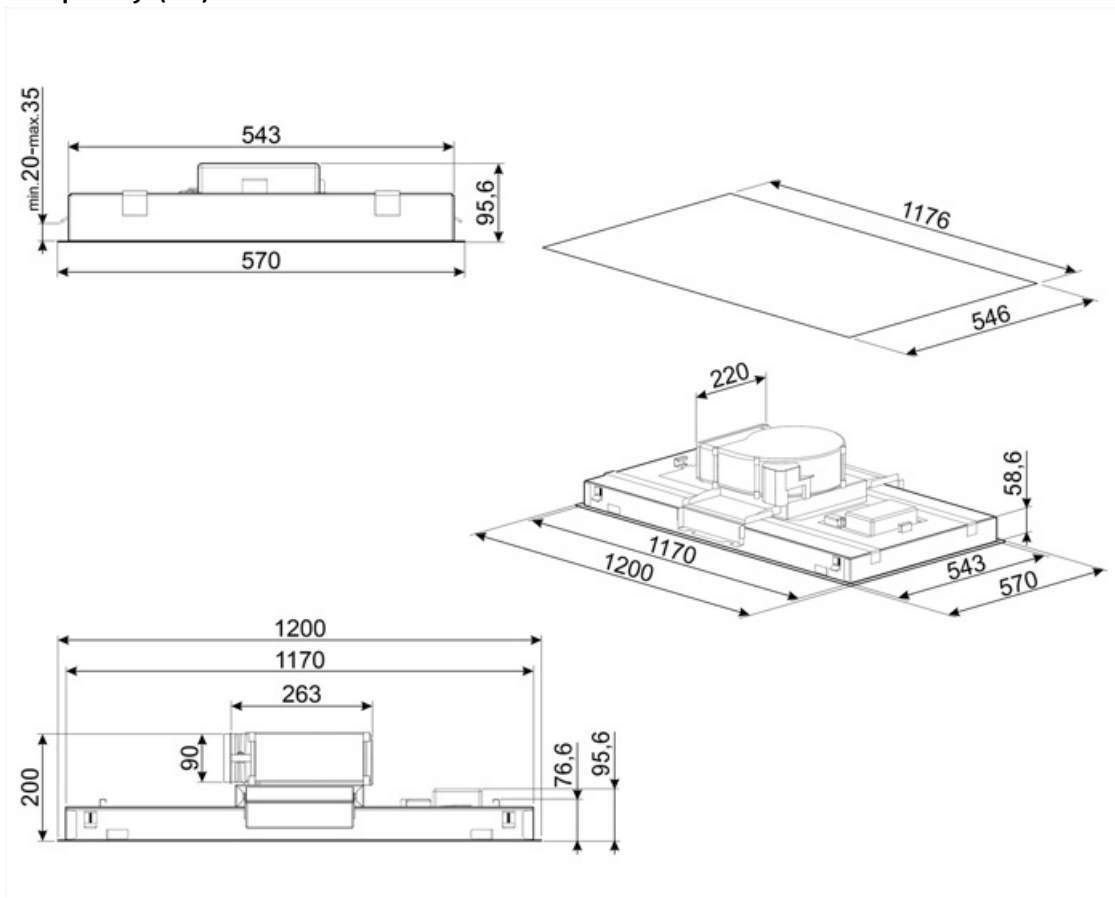

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR












1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

Symbols glossary

| | | | |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | Warning light(s): to advise when filters need changing. |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | Connection between hob and hood |
|  | Dimming Lights |  | Tunable white from warm to cold. |
|  | | | |