


# KLT12L4X



<b>Product family</b>	Hood
<b>Hood Type</b>	Ceiling Cooker Hoods
<b>Design</b>	Ceiling
<b>Extraction</b>	Ducted out or re-circulation possible
<b>Electronic control</b>	Yes
<b>Perimeter extraction</b>	Yes
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709326203



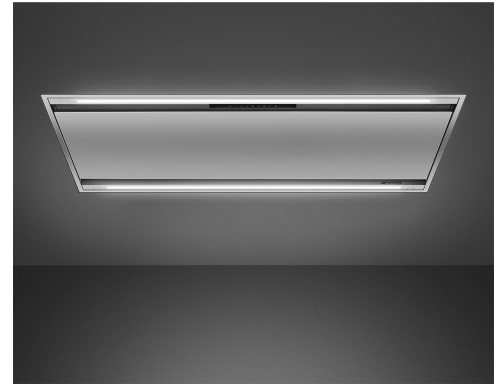



## Aesthetics

<b>Aesthetics</b>	Universal	<b>Finishing</b>	Brushed
<b>Colour</b>	Stainless steel	<b>Logo</b>	Silk screen


## Controls

<b>Control setting</b>	Touch control back-lighted White
------------------------	-------------------------------------

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	
<b>Auto-Vent 2.0</b>	

## Technical Features

    	<b>No. of lights</b>	2	<b>No. of filters</b>	4
	<b>Light type</b>	LED	<b>Anti-grease filters</b>	Aluminium
	<b>Light power</b>	7.4 W		
	<b>Dimmer mode</b>	Yes		


Light colour temperature range	3000° - 5700° °K	Filter replacement indicator	Yes
Free outlet maximum capacity	610 m <sup>3</sup> /h	Vent outlet	150 mm
Motor power	270 W	Minimum distance from GAS hob	650 mm
		Minimum distance from ELECTRIC hob	650 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	194	51
Speed 2	315	57
Speed 3	447	65
Intensive speed	591	71

## Accessories Included

Remote control	Yes
----------------	-----


## Performance / Energy Label

 Annual Efficiency Consumption (AEChood)	91 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency (FDE)	27,1	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1,0
Lighting Efficiency (LE)	20,1 lux/W	Energy Efficiency Index per first cavity	63,0
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	339.3 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	62,7 %	Measured air pressure at best efficiency point (Qbep)	632 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	219.5 W
Air flow at minimum speed (Qmin)	194 m <sup>3</sup> /h	Normal Power of the light system (WI)	14.8 W
Maximum extraction rate	447 m <sup>3</sup> /h		
Intensive extraction rate	591 m <sup>3</sup> /h		
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	51 dBA		

Average illumination of the light on the cooking surface (E<sub>middle</sub>) 298 lux  
 Sound power level at highest setting (L<sub>wa</sub>) 66 dBA

## Electrical Connection

Nominal power	305 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

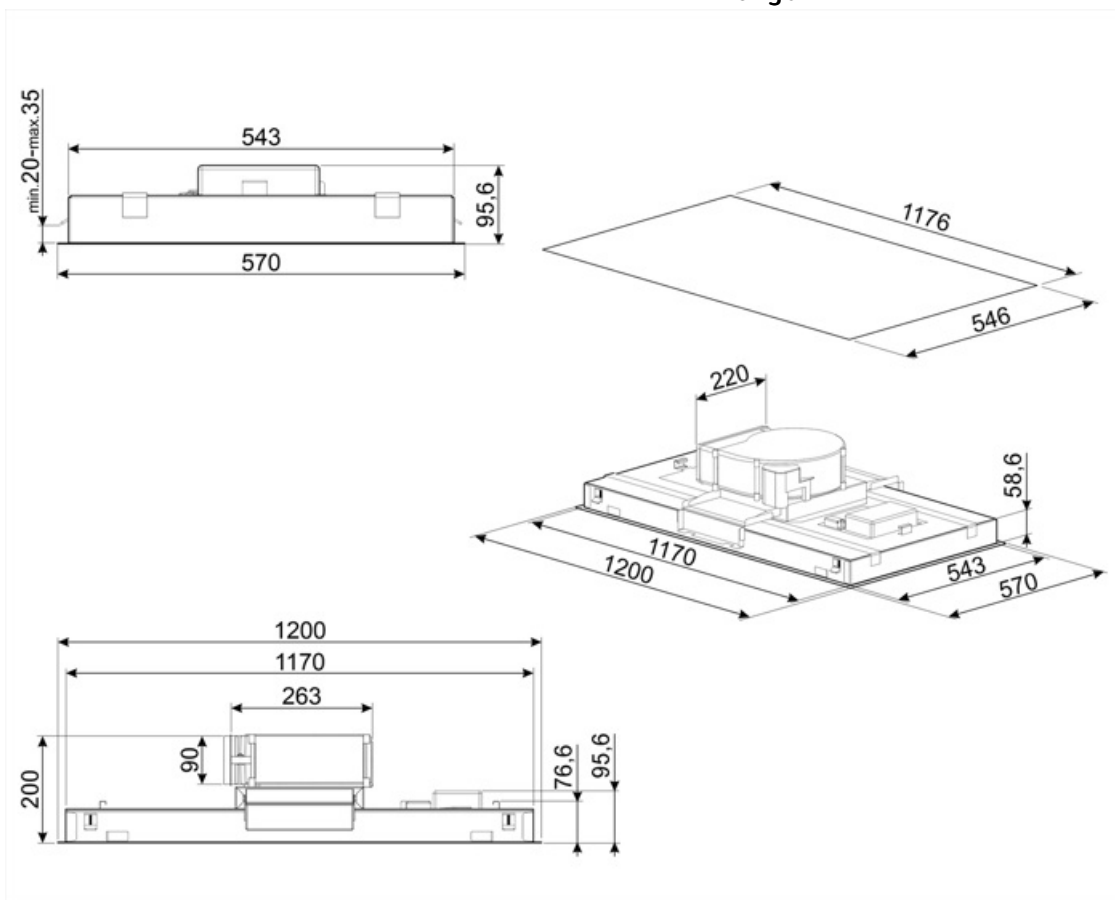

---


## Not included accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCKLTR











1 pcs of Charcoal filter Regenerable\* suitable for all the KLT\* models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



### RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Intensive/turbo setting: when extra fast extraction is required.		...
	...		...
