

KLT12L4X




Product family Hood Ceiling hood **Hood Type** Design Ceiling Extraction Extraction **Electronic control** Yes Yes Perimeter extraction

Material Stainless steel Type of steel Brushed

EAN code 8017709326203

Hood width 120 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Silk screen Logo



Controls

Control setting Touch control back-lighted

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









Technical Features











No. of lights 2 Light type **LED Light Power** 7,4 W Dimmer mode

Light color temperature

range

Free outlet maximum

capacity

Motor power

Filter replacement indicator

3000 - 5700 K

610 m³/h

270 W

No. of filters

Anti-grease filters Aluminium Yes

Vent outlet Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

650 mm

Yes

150 mm

650 mm

Non return valve

SMEG SPA 12/6/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	194	51
Speed 2	315	57
Speed 3	447	65
Intensive speed	591	71

Accessories included

Remote control Yes

Performance / Energy Label

(В	A'

Annual Efficiency 91 kWh/a Consumption (AEChood) Energy efficieency class B Fluid Dynamic Efficiency 27,1 (FDE) Fluid Dynamic Efficiency B class (FDEC) Lighting Efficiency (LE) 20,1 lux/W Lighting Efficiency Class B (LEC) **Grease Filtering** 62,7 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 194 m³/h speed (Qmin) Air flow at maximum 447 m³/h speed (Qmax) Air flow at boost speed 591 m³/h (Qboost)

Airbourne acouistical A- 51 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-66 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 1,0 **Energy Efficiency Index** 63.0 Measured air flow rate 339,3 m³/h at best efficiency point (Qbep) Measured air pressure 632 Pa at best efficiency point (Pbep) Measured electric 219.5 W power input at best efficiency point (Wbep) 14,8 W **Nominal Power** consumption of the light system (WL) Average illumination of 298 lux the light on the cooking

66 dBA

Electrical Connection

SMEG SPA 12/6/2025


surface (Emiddle) Sound power level at

highest setting (Lwa)



Electrical connection 305 W Power supply cable 1500 mm rating length

Voltage 220-240 V Plug Not present

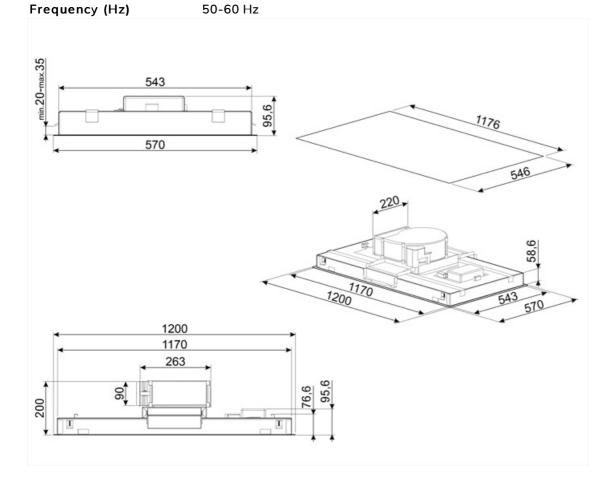

SMEG SPA 12/6/2025



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 \emptyset

SMEG SPA 12/6/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Connection between hob and hood



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights



Tunable white from warm to cold



SMEG SPA 12/6/2025