

KL T90XS



Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709287405
Hood width	90 cm



Aesthetics

Aesthetic	Universale	Finishing	Satin
Colour	Stainless steel	Logo	Silk screen

Controls

Control setting	Electronic buttons
-----------------	--------------------

Programme / Functions

No. of speeds	3
Intensive speed	

Technical Features



Free outlet maximum capacity	610 m³/h	Vent outlet	150 mm
Motor power	270 W	Minimum distance from GAS hob	650 mm
No. of filters	3	Minimum distance from ELECTRIC hob	650 mm
Anti-grease filters	Aluminium	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	213	51
Speed 2	329	56
Speed 3	459	64
Intensive speed	604	70

Accessories Included

Remote control Yes

Performance / Energy Label

B

Annual Efficiency Consumption (AEChood) 94 kWh/a

Energy efficiency class (EEC) B

Fluid Dynamic Efficiency (FDE) 27,5

Fluid Dynamic Efficiency class (FDEC) B

Lighting Efficiency Class (LEC) NA

Grease Filtering Efficiency (GFE) 43,0 %

Grease Filtering Efficiency Class (GFEC) G

Air flow at minumum speed (Qmin) 213 m³/h

Air flow at maximum speed (Qmax) 459 m³/h

Air flow at boost speed (Qboost) 604 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 50 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 64 dB(A)

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 69 dB(A)

Power consumption in stand-by mode (Ps) 0,40 W

Time increase factor (F) 1,0

Energy Efficiency Index 59,1

Measured air flow rate at best efficiency point (Qbep) 358 m³/h

Measured air pressure at best efficiency point (Pbep) 633 Pa

Measured electric power input at best efficiency point (Wbep) 229 W

Sound power level at highest setting (Lwa) 70 dB(A)


Electrical Connection

Electrical connection rating 270 W


Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm

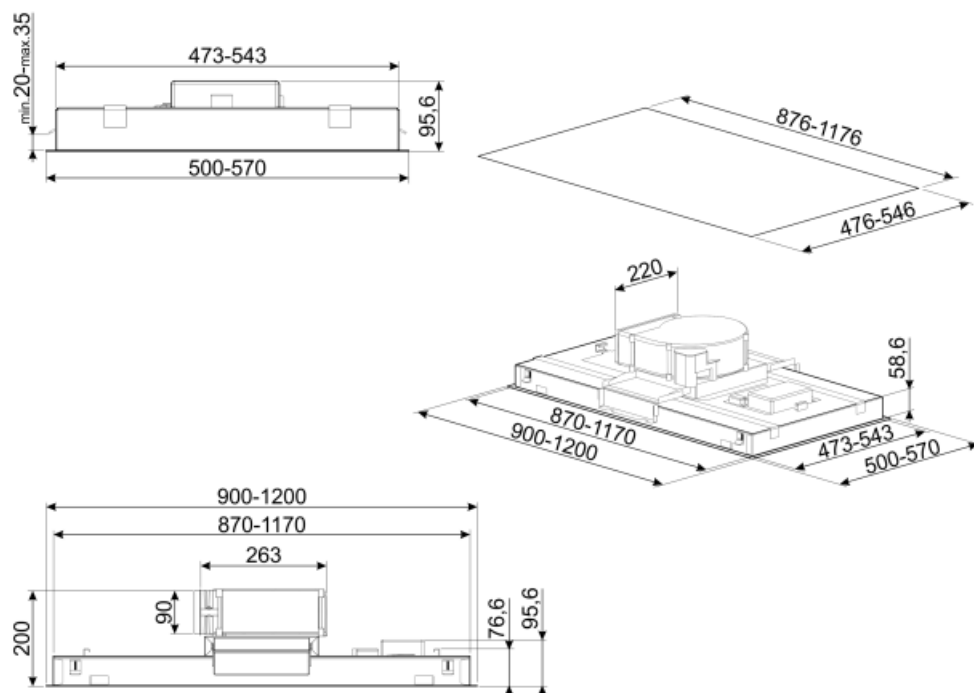

Not included accessories



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 Ø



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Perimeter extraction panels: very efficient and aid noise reduction.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Intensive/turbo setting: when extra fast extraction is required.