

# KLT9L4WH







|                             |                                       |
|-----------------------------|---------------------------------------|
| <b>Product family</b>       | Hood                                  |
| <b>Hood Type</b>            | Ceiling Cooker Hoods                  |
| <b>Design</b>               | Ceiling                               |
| <b>Extraction</b>           | Ducted out or re-circulation possible |
| <b>Electronic control</b>   | Yes                                   |
| <b>Perimeter extraction</b> | Yes                                   |
| <b>Material</b>             | Stainless steel                       |
| <b>Type of steel</b>        | Brushed                               |
| <b>EAN code</b>             | 8017709326210                         |
| <b>Hood width</b>           | 90 cm                                 |
| <b>Aesthetics</b>           | Universal                             |
| <b>Colour</b>               | Matte White                           |
| <b>Finishing</b>            | Brushed                               |
| <b>Logo</b>                 | Silk screen                           |



## Controls

|                        |                                     |
|------------------------|-------------------------------------|
| <b>Control setting</b> | Touch control back-lighted<br>White |
|------------------------|-------------------------------------|

## Program / Functions

|                                |   |
|--------------------------------|---|
| <b>No. of speeds</b>           | 3   |
| <b>Intensive speed</b>         |  |
| <b>24h air filter function</b> |  |
| <b>Time-setting options</b>    |  |
| <b>Auto-Vent 2.0</b>           |  |

## Technical Features



|   |                       |   |           |
|---|-----------------------|---|-----------|
| <b>No. of lights</b>                      | 2                     | <b>No. of filters</b>                     | 3         |
| <b>Light type</b>                         | LED                   | <b>Anti-grease filters</b>                | Aluminium |
| <b>Light power</b>                        | 7.4 W                 | <b>Filter replacement indicator</b>       | Yes       |
| <b>Light colour temperature scale (K)</b> | 3000 K                | <b>Vent outlet</b>                        | 150 mm    |
| <b>Light colour temperature range</b>     | 3000 - 5700 K         | <b>Minimum distance from GAS hob</b>      | 650 mm    |
| <b>Free outlet maximum capacity</b>       | 610 m <sup>3</sup> /h | <b>Minimum distance from ELECTRIC hob</b> | 650 mm    |
| <b>Motor power</b>                        | 270 W                 | <b>Non return valve</b>                   | Yes       |

|                 | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1         | 208   | 48                               |
| Speed 2         | 323   | 55                               |
| Speed 3         | 452   | 62                               |
| Intensive speed | 594   | 69                               |

## Accessories Included

Remote control Yes

## Performance / Energy Label




|  |                       |  |                       |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood)  | 94 kWh/year           | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 48 dBA                |
| Energy efficiency class (EEC)            | B                     | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 63 dBA                |
| Fluid Dynamic Efficiency (FDE)           | 25.9                  | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 69 dBA                |
| Fluid Dynamic Efficiency class (FDEC)    | B                     | Time increase factor (F)   | 1.1                   |
| Lighting Efficiency (LE)                 | 25.9 lux/W            | Energy Efficiency Index per first cavity                                       | 68.7                  |
| Lighting Efficiency Class (LEC)          | B                     | Measured air flow rate at best efficiency point (Qbep)                         | 335 m <sup>3</sup> /h |
| Grease Filtering Efficiency (GFE)        | 72.0 %                | Measured air pressure at best efficiency point (Qbep)                          | 630 Pa                |
| Grease Filtering Efficiency Class (GFEC) | D                     | Measured electric power input at best efficiency point (Wbep)                  | 226 W                 |
| Air flow at mininum speed (Qmin)         | 208 m <sup>3</sup> /h | Normal Power of the light system (WI)  | 15 W                  |
| Maximum extraction rate                  | 452 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 303 lux               |
| Intensive extraction rate                | 594 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 63 dBA                |

## Electrical Connection

|               |       |                           |         |
|---------------|-------|---------------------------|---------|
| Nominal power | 305 W | Power supply cable length | 1500 mm |
|---------------|-------|---------------------------|---------|

---

|                |           |      |    |
|----------------|-----------|------|----|
| Voltage        | 220-240 V | Plug | No |
| Frequency (Hz) | 50-60 Hz  |      |    |

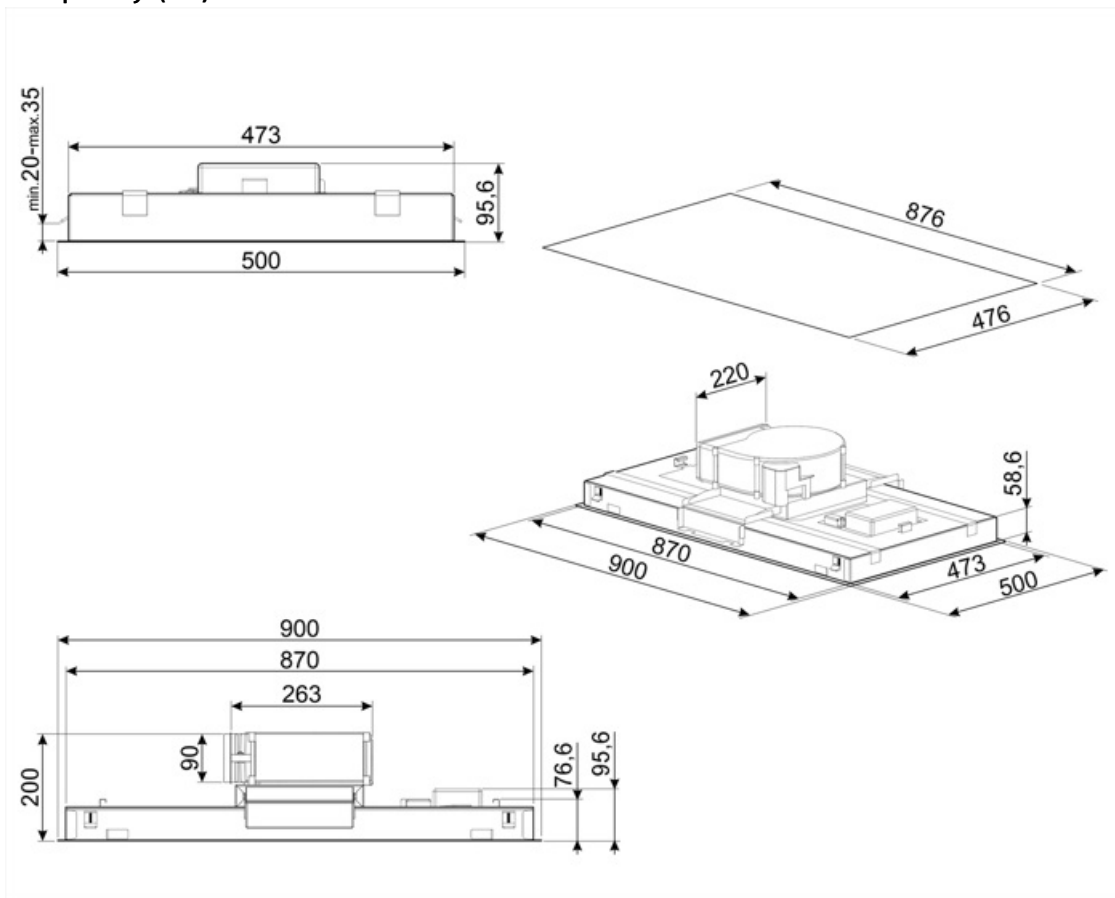

---

## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCKLTR











1 pcs of Charcoal filter Regenerable\* suitable for all the KLT\* models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



### RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

## Symbols glossary

|  |   |   |   |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.                        |  | Warning light(s): to advise when filters need changing.   |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |  | Perimeter extraction panels: very efficient and aid noise reduction.                                    |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | Connection between hob and hood   |
|  | Tunable white from warm to cold.  |  |   |