KLT9L4WH



Product family	Hood
Hood Type	Ceiling Cooker Hoods
Design	Ceiling
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709326210
Hood width	90 cm
Aesthetics	Universal
Colour	Matte White
Finishing	Brushed
Logo	Silk screen

Controls

Control setting	Touch control back-lighted White

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features

No. of lights	2	**No. of filters**	3
Light type	LED	**Anti-grease filters**	Aluminium
Light power	7,4 W	**Filter replacement indicator**	Yes
Light colour temperature scale (K)	3000 K	**Vent outlet**	150 mm
Light colour temperature range	3000 - 5700 K	**Minimum distance from GAS hob**	650 mm
Free outlet maximum capacity	610 m³/h	**Minimum distance from ELECTRIC hob**	650 mm
Motor power	270 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	208	48
Speed 2	323	55
Speed 3	452	62
Intensive speed	594	69

Accessories Included

Remote control	Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	94 kWh/year
Energy efficiency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	25,9
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	25,9 lux/W
Lighting Efficiency Class (LEC)	B
Grease Filtering Efficiency (GFE)	72,0 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minumum speed (Qmin)	208 m³/h
Maximum extraction rate	452 m³/h
Intensive extraction rate	594 m³/h


Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Time increase factor (F)	1,1
Energy Efficiency Index per first cavity	68,7
Measured air flow rate at best efficiency point (Qbep)	335 m³/h
Measured air pressure at best efficiency point (Qbep)	630 Pa
Measured electric power input at best efficiency point (Wbep)	226 W
Normal Power of the light system (WI)	15 W
Average illumination of the light on the cooking surface (Emiddle)	303 lux
Sound power level at highest setting (Lwa)	63 dBA

Electrical Connection

Nominal power	305 W

Power supply cable length	1500 mm

Voltage	220-240 V	**Plug**	No
Frequency (Hz)	50-60 Hz		

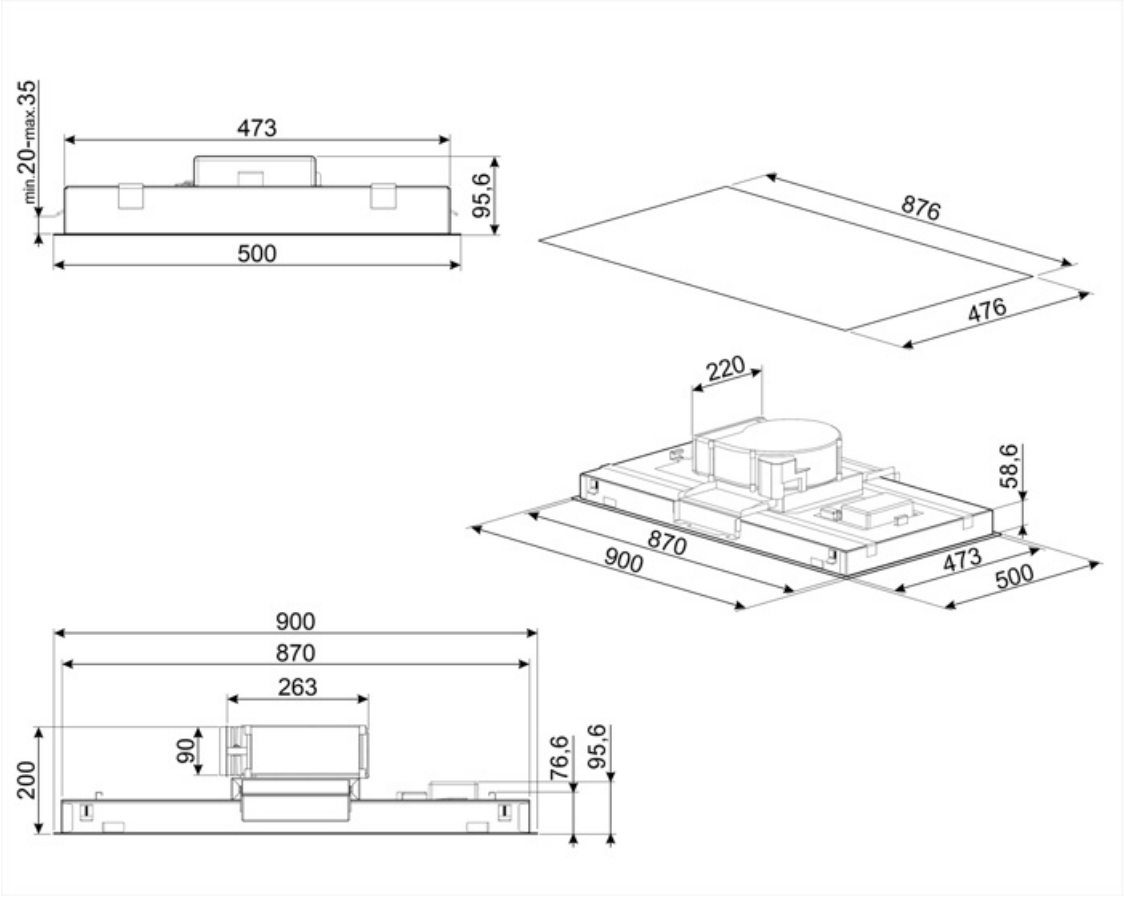

Compatible Accessories




KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



RRA90

Round to rectangular adapter 220x90 mm to 150 Ø



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Connection between hob and hood





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Tunable white from warm to cold.