

KLT9L4WH



| | |
|----------------------|-----------------|
| Product family | Hood |
| Hood Type | Ceiling hood |
| Design | Ceiling |
| Extraction | Extraction |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709326210 |
| Hood width | 90 cm |
| Aesthetic | Universale |
| Colour | Matt White |
| Finishing | Satin |
| Logo | Silk screen |



Controls

| | |
|-----------------|-------------------------------------|
| Control setting | Touch control back-lighted White |
|-----------------|-------------------------------------|

Program / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |
| Auto-vent 2.0 |  |

Technical Features



| | | | |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 2 | No. of filters | 3 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light Power | 7,4 W | Filter replacement indicator | Yes |
| Light color temperature scale (K) | 3000 K | Vent outlet | 150 mm |
| Light color temperature range | 3000 - 5700 K | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 610 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 270 W | Non return valve | Yes |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 208 | 48 |
| Speed 2 | 323 | 55 |
| Speed 3 | 452 | 62 |
| Intensive speed | 594 | 69 |

Accessories included

Remote control Yes


Performance / Energy Label



| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 94 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 48 dBA |
| Energy efficiency class (EEC) | B | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 63 dBA |
| Fluid Dynamic Efficiency (FDE) | 25,9 | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 69 dBA |
| Fluid Dynamic Efficiency class (FDEC) | B | Time increase factor (F) | 1,1 |
| Lighting Efficiency (LE) | 25,9 lux/W | Energy Efficiency Index | 68,7 |
| Lighting Efficiency Class (LEC) | B | Measured air flow rate at best efficiency point (Qbep) | 335 m ³ /h |
| Grease Filtering Efficiency (GFE) | 72,0 % | Measured air pressure at best efficiency point (Pbep) | 630 Pa |
| Grease Filtering Efficiency Class (GFEC) | D | Measured electric power input at best efficiency point (Wbep) | 226 W |
| Air flow at minumum speed (Qmin) | 208 m ³ /h | Nominal Power consumption of the light system (WL) | 15 W |
| Air flow at maximum speed (Qmax) | 452 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 303 lux |
| Air flow at boost speed (Qboost) | 594 m ³ /h | Sound power level at highest setting (Lwa) | 63 dBA |

Electrical Connection

| | | | |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 305 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz | | |

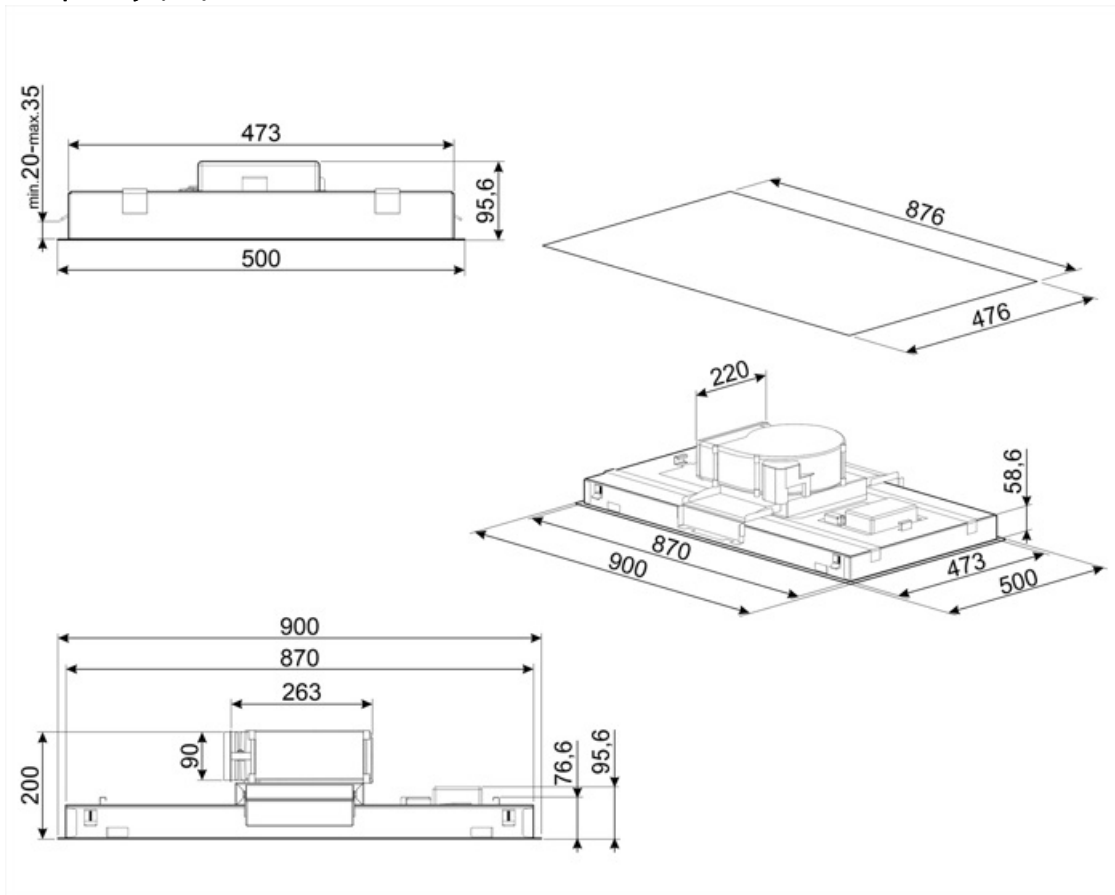


Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR











1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 Ø

Symbols glossary

| | | | |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | Warning light(s): to advise when filters need changing. |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | Connection between hob and hood |
|  | Tunable white from warm to cold. |  | |