

# KLT9L4WH







<b>Product family</b>	Hood
<b>Tipo de Exaustor</b>	Ceiling hood
<b>Design</b>	Ceiling
<b>Extraction</b>	Extraction
<b>Electronic control</b>	Yes
<b>Perimeter extraction</b>	Yes
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709326210
<b>Aesthetic</b>	Universal
<b>Colour</b>	Matt White
<b>Acabamento</b>	Satin
<b>Logotipo</b>	Logotipo serigrafado



## Controls

<b>Control setting</b>	Controle de toque retroiluminado Branco
------------------------	--

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Other functions</b>	No
<b>Time-setting options</b>	
<b>Other options</b>	No
<b>Ventilação automática</b>	No
<b>Ventilação automática 2.0</b>	

## Technical Features



<b>Hood without motor</b>	No	<b>Motor power</b>	270 W
<b>Remote motor</b>	No	<b>No. of filters</b>	3
<b>No. of lights</b>	2	<b>Anti-grease filters</b>	Aluminium
<b>Light type</b>	LED	<b>Charcoal filters included</b>	No
<b>Light Power</b>	7.4 W	<b>Filter replacement indicator</b>	Yes
<b>Dimmer mode</b>	No	<b>Vent outlet</b>	150 mm

Escala de temperatura de cor clara (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Faixa de temperatura de cor clara	3000° - 5700° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	610 m <sup>3</sup> /h	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	208	48
Speed 2	323	55
Speed 3	452	62
Intensive speed	594	69

## Accessories Included

Remote control	Yes	Tube reduction	No
Sliding door	No		


## Performance / Energy Label



Consumo anual de energia (CAE exaustor)	94 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Energy efficiency class ( EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency (FDE)	25.9	Power consumption in stand-by mode (Ps)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1.1
Lighting Efficiency (LE)	25.9 lux/W	Energy Efficiency Index	68.7
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	335 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	72.0 %	Measured air pressure at best efficiency point (Pbep)	630 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	226 W
Air flow at minumum speed (Qmin)	208 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	15 W
Air flow at maximum speed (Qmax)	452 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	303 lux
Air flow at boost speed (Qboost)	594 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	63 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		

## Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	305 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

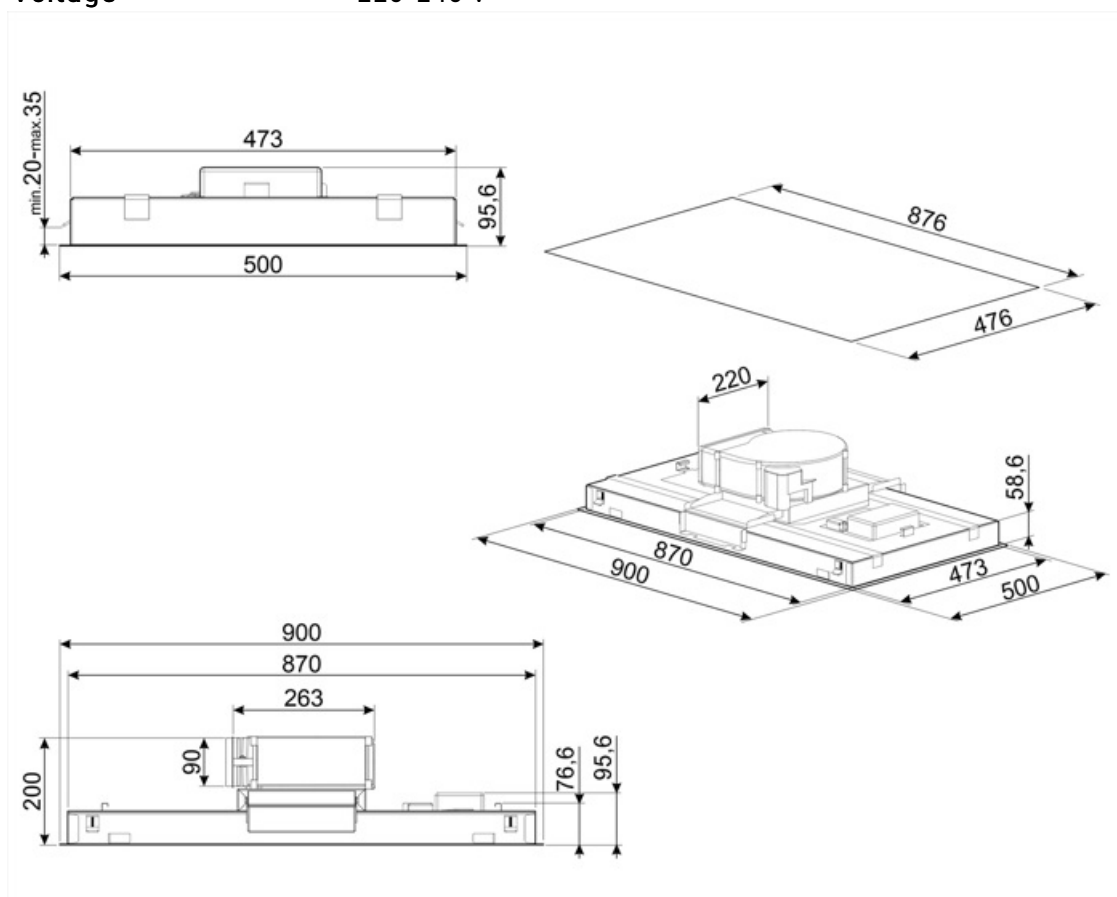

---


## Compatible Accessories

---



### **KITALLFC**

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos



### **KITFCKLTR**











1 pcs de filtro de carvão Regenerável\* adequado para todos os modelos KLT\*. \* Pode ser lavado na máquina lava-louça até 12 vezes e seco no forno a no máximo 90° durante 60 min. dimensão 235(H )x 200 (L) x 10 (D) mm



### **RRA90**

Round to rectangular adapter 220x90 mm to 150 Ø

## Symbols glossary

	24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.		Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
	Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.		Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.
	Configuração intensiva/turbo: quando a extração extra rápida é necessária.		Ligação entre a placa e o exaustor
	Branco sintonizável do quente ao frio		

---

## **Benefit (TT)**

---

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.