

KLT9L4X



Product family

Hood Type Ceiling Cooker Hoods

Design Ceiling

Extraction Ducted out or re-circulation possible

Electronic control Yes

Perimeter extraction Yes

Material Stainless steel

Type of steel Brushed

EAN code 8017709326227

Hood width 90 cm

Aesthetics Universal

Colour Stainless steel

Finishing Brushed

Logo Silk screen



Controls

Control setting Touch control back-lighted
White

Program / Functions

No. of speeds 3

3



Intensive speed



24h air filter function



Time-setting options



Auto-Vent 2.0

Technical Features



No. of lights 2

No. of filters 3

Light type LED

Aluminium

Light power 7.4 W

Anti-grease filters

Light colour 3000 K

Yes

temperature scale (K)

Filter replacement

Light colour 3000 - 5700 K

indicator

temperature range

Vent outlet

150 mm

Free outlet maximum

Minimum distance from

650 mm

capacity 610 m³/h

GAS hob

650 mm

Motor power 270 W

Minimum distance from

ELECTRIC hob

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	208	48
Speed 2	323	55
Speed 3	452	62
Intensive speed	594	69

Accessories Included

Remote control Yes

Performance / Energy Label

E6	
Annual Efficiency Consumption (AEChood)	94 kWh/year
Energy efficiency class (EEC)	Airbourne acoustical A- 48 dBA weighted sound Power Emission at minimum speed (SPEmin)
Fluid Dynamic Efficiency (FDE)	Airborne acoustical A- 63 dBA weighted sound Power Emission at maximum speed (SPEmax)
Fluid Dynamic Efficiency class (FDEC)	Airbourne acoustical A- 69 dBA weighted sound power emission at boost speed (SPEboost)
Lighting Efficiency (LE)	25,9 lux/W
Lighting Efficiency Class (LEC)	Time increase factor (F) 1,1
Grease Filtering Efficiency (GFE)	Energy Efficiency Index 68,7 per first cavity
Grease Filtering Efficiency Class (GFEC)	Measured air flow rate at best efficiency point (Qbep) 335 m³/h
Air flow at minimum speed (Qmin)	Measured air pressure at best efficiency point (Qbep) 630 Pa
Maximum extraction rate	Measured electric power input at best efficiency point (Wbep) 226 W
Intensive extraction rate	Normal Power of the light system (WI) 15 W
	Average illumination of the light on the cooking surface (Emiddle) 303 lux
	Sound power level at highest setting (Lwa) 63 dBA

Electrical Connection

Nominal power	305 W	Power supply cable length	1500 mm
---------------	-------	---------------------------	---------

Voltage


220-240 V

Plug

No

Frequency (Hz)


50-60 Hz

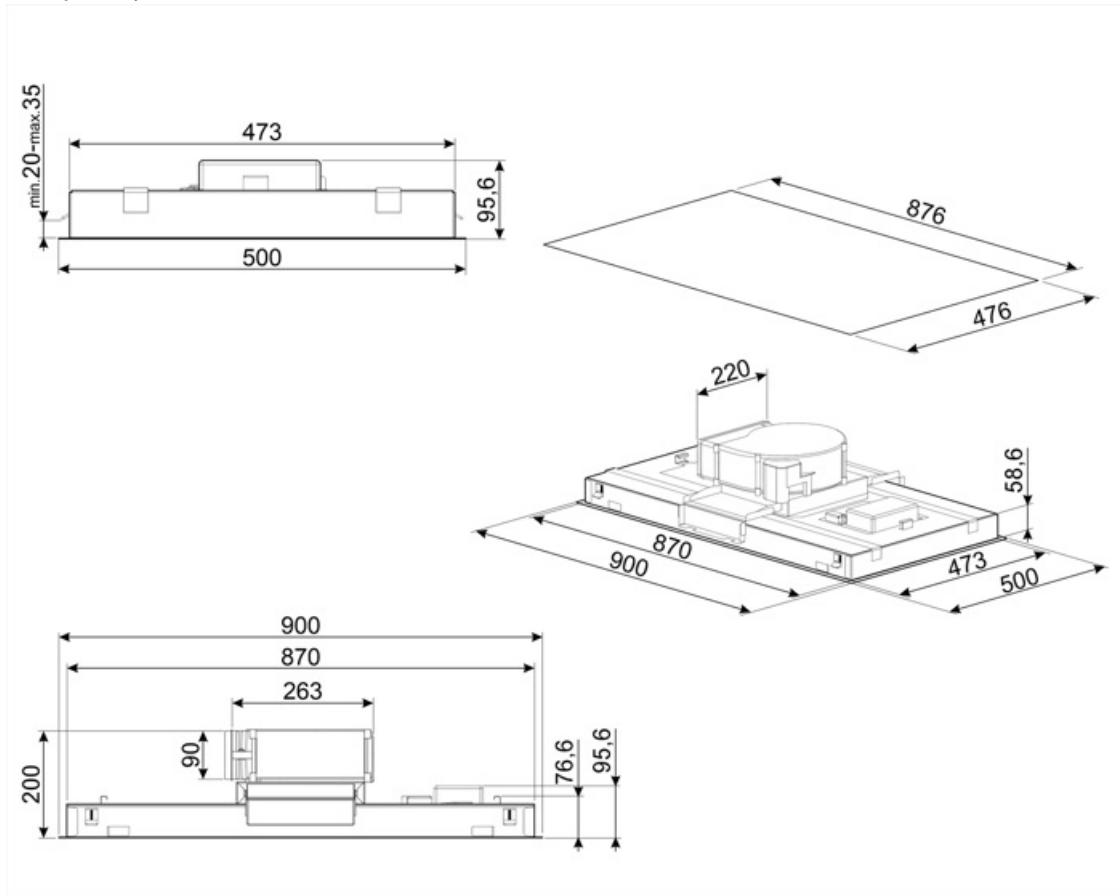

Compatible Accessories

**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

**KITFCKLTR**

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H) x 200 (L) x 10 (D) mm

**RRA90**

Round to rectangular adapter 220x90 mm to 150 Ø

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Connection between hob and hood		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
			Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Tunable white from warm to cold.		Intensive/turbo setting: when extra fast extraction is required.