

KLT9L4X



Product family Hood

Hood Type Ceiling Cooker Hoods

Design Ceiling

Extraction Ducted out or re-circulation possible

Electronic control Yes
Perimeter extraction Yes

MaterialStainless steelType of steelBrushed

EAN code 8017709326227

Hood width 90 cm

Aesthetics Universal

Colour Stainless steel

Finishing Brushed

Logo Silk screen



Controls

Control setting Touch control back-lighted

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-Vent 2.0









Technical Features









No. of lights 2
Light type LED
Light power 7.4 W
Light colour 3000 K

temperature scale (K)

Light colour 3000 - 5700 K

610 m³/h

temperature range

Free outlet maximum

capacity

Motor power 270 W

No. of filters

Anti-grease filters

Filter replacement indicator

Vent outlet
Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

650 mm

150 mm

650 mm

Aluminium

Yes

Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	208	48
Speed 2	323	55
Speed 3	452	62
Intensive speed	594	69

Accessories Included

Remote control Yes

Performance / Energy Label

(В	A'

Annual Efficiency 94 kWh/year Consumption (AEChood) Energy efficiency class (B Fluid Dynamic Efficiency 25.9 (FDE) Fluid Dynamic Efficiency B class (FDEC) Lighting Efficiency (LE) 25.9 lux/W Lighting Efficiency Class B (LEC) **Grease Filtering** 72.0 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 208 m³/h speed (Qmin) 452 m³/h Maximum extraction rate Intensive extraction rate 594 m³/h


Airbourne acouistical A- 48 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-63 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 69 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 1.1 **Energy Efficiency Index** 68.7 per first cavity Measured air flow rate 335 m³/h at best efficiency point (Qbep) Measured air pressure 630 Pa at best efficiency point (Qbep) Measured electric 226 W power input at best efficiency point (Wbep) Normal Power of the 15 W light system (WI) Average illumination of 303 lux the light on the cooking surface (Emiddle) Sound power level at 63 dBA

highest setting (Lwa)

Electrical Connection

Nominal power 305 W Frequency (Hz) 50-60 Hz



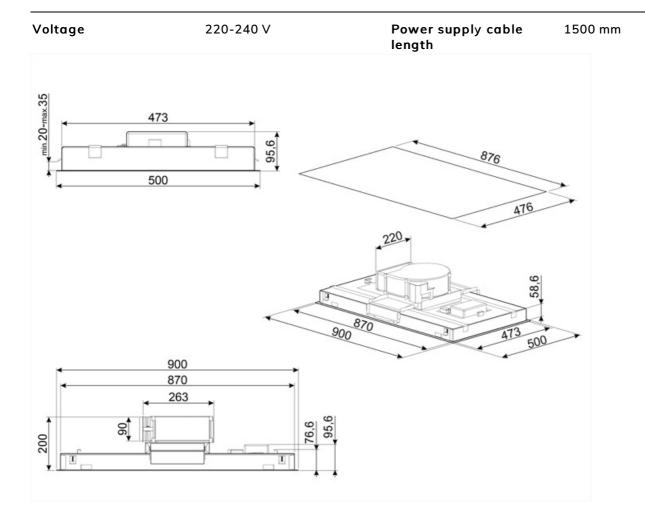



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKLTR

1 pcs of Charcoal filter Regenerable* suitable for all the KLT* models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 235(H)x 200 (L) x 10 (D) mm



RRA90

Round to rectangular adapter 220x90 mm to 150 \emptyset



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Connection between hob and hood




Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



10

Warning light(s): to advise when filters need changing.





Perimeter extraction panels: very efficient and aid noise reduction.



...

Intensive/turbo setting: when extra fast extraction is required.