KLTI12L4MB

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Painted material + Glass
EAN code	8017709312251
Hood width	120 cm
Aesthetics	Universal
Colour	Matte Black
Glass Type	Black
Logo	Silk screen



Controls

Control setting	Touch control back-lighted White	**Led colour**	White

Program / Functions

No. of speeds	3
Intensive speed	BOOST
24h air filter function	24
Time-setting options	
Auto-Vent 2.0	

Technical Features

No. of lights	2	**No. of filters**	3
Light type	LED	**Anti-grease filters**	Aluminium
Light power	7,4 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light colour temperature range	2700 - 4000 K	**Minimum distance from GAS hob**	750 mm
Free outlet maximum capacity	820 m³/h	**Minimum distance from ELECTRIC hob**	650 mm
Motor power	275 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	220	43
Speed 2	335	53
Speed 3	560	65
Intensive speed	739	71

Accessories Included

Tube reduction	Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	55 kWh/year
Energy efficiency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	33,9
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	20,3 lux/W
Lighting Efficiency Class (LEC)	D
Grease Filtering Efficiency (GFE)	73,2 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minumum speed (Qmin)	220 m³/h
Maximum extraction rate	560 m³/h
Intensive extraction rate	739 m³/h


Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	43 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Energy Efficiency Index per first cavity	51,5
Measured air flow rate at best efficiency point (Qbep)	384 m³/h
Measured air pressure at best efficiency point (Qbep)	376 Pa
Measured electric power input at best efficiency point (Wbep)	151 W
Normal Power of the light system (Wl)	15 W
Average illumination of the light on the cooking surface (Emiddle)	300 lux
Sound power level at highest setting (Lwa)	66 dBA

Electrical Connection

Nominal power	291 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz
Power supply cable length	1500 mm
Plug	No

Also available

Alternative colours availible	Matte Black	**Available colours**	KLTI12L4MB

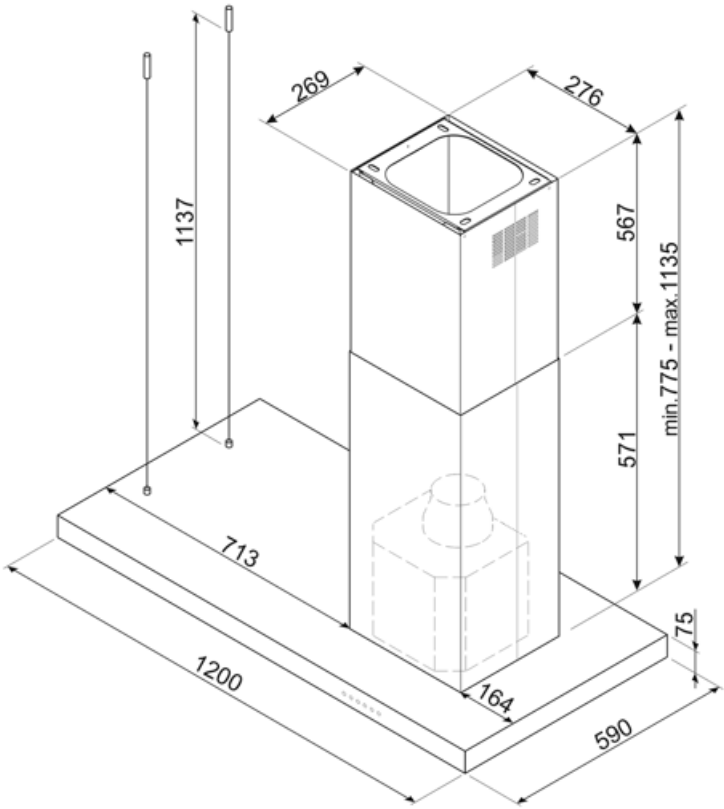


Compatible Accessories




KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Connection between hob and hood



Tunable white from warm to cold.