

KLTI12L4MB

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Painted material + Glass
EAN code	8017709312251
Hood width	120 cm
Aesthetics	Universal
Colour	Matte Black
Glass Type	Black
Logo	Silk screen



Controls

Control setting	Touch control back-lighted White	Led colour	White
------------------------	-------------------------------------	-------------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7,4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	2700 - 4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m ³ /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	220	43
Speed 2	335	53
Speed 3	560	65
Intensive speed	739	71

Accessories Included

Tube reduction Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	55 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	43 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Fluid Dynamic Efficiency (FDE)	33,9	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Energy Efficiency Index per first cavity	51,5
Lighting Efficiency (LE)	20,3 lux/W	Measured air flow rate at best efficiency point (Qbep)	384 m ³ /h
Lighting Efficiency Class (LEC)	D	Measured air pressure at best efficiency point (Qbep)	376 Pa
Grease Filtering Efficiency (GFE)	73,2 %	Measured electric power input at best efficiency point (Wbep)	151 W
Grease Filtering Efficiency Class (GFEC)	D	Normal Power of the light system (Wl)	15 W
Air flow at minumum speed (Qmin)	220 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	300 lux
Maximum extraction rate	560 m ³ /h	Sound power level at highest setting (Lwa)	66 dBA
Intensive extraction rate	739 m ³ /h		

Electrical Connection

Nominal power	291 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		


Also available

Alternative colours available

Matte Black

Available colours

KLT112L4MB

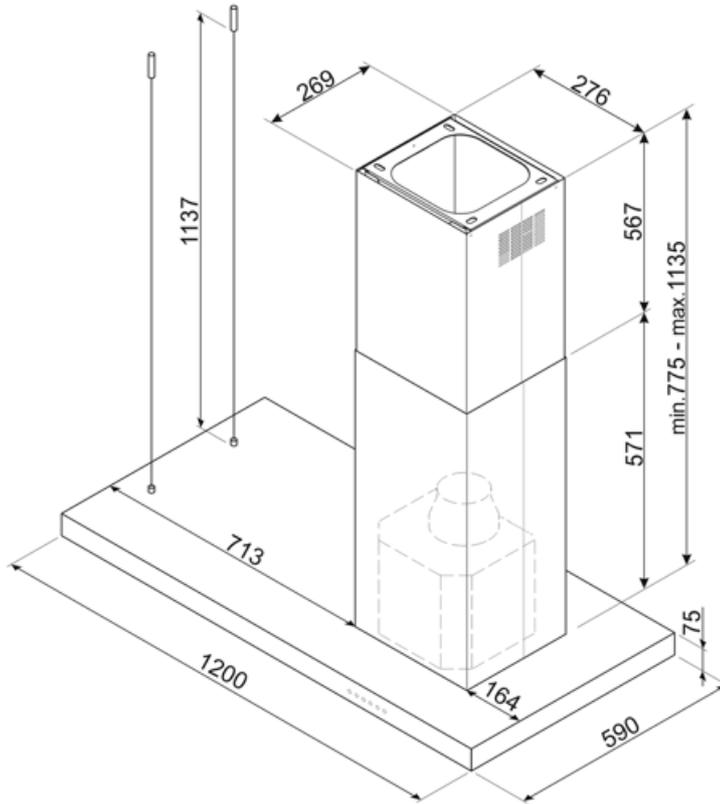


Compatible Accessories




KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Connection between hob and hood		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Dimming Lights
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		Tunable white from warm to cold.