

KLTI12L4MB

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Painted material + Glass
EAN code	8017709312251
Hood width	120 cm







Aesthetics

Aesthetics	Universal	Glass Type	Black
Colour	Matte Black	Logo	Silk screen

Controls

Control setting	Touch control back-lighted	Led colour	White
	White		

Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features

    			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7.4 W		
Dimmer mode	Yes		

Light colour temperature range	2700° - 4000° °K	Filter replacement indicator	Yes
Free outlet maximum capacity	820 m³/h	Vent outlet	150 mm
Motor power	275 W	Minimum distance from GAS hob	750 mm
		Minimum distance from ELECTRIC hob	650 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	220	43
Speed 2	335	53
Speed 3	560	65
Intensive speed	739	71

Accessories Included

Tube reduction	Yes
----------------	-----

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	55 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dB(A)
Fluid Dynamic Efficiency (FDE)	33,9	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0,49 W
Lighting Efficiency (LE)	20,3 lux/W	Energy Efficiency Index per first cavity	51,5
Lighting Efficiency Class (LEC)	D	Measured air flow rate at best efficiency point (Qbep)	384 m³/h
Grease Filtering Efficiency (GFE)	73,2 %	Measured air pressure at best efficiency point (Qbep)	376 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at minimum speed (Qmin)	220 m³/h	Normal Power of the light system (WI)	15 W
Maximum extraction rate	560 m³/h		
Intensive extraction rate	739 m³/h		
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	43 dB(A)		


Average illumination of the light on the cooking surface (E _{middle})	300 lux
Sound power level at highest setting (L _{wa})	66 dB(A)

Electrical Connection

Nominal power	291 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

Also available

Alternative colours available	Matt Black	Available colours	KLT112L4MB
-------------------------------	------------	-------------------	------------

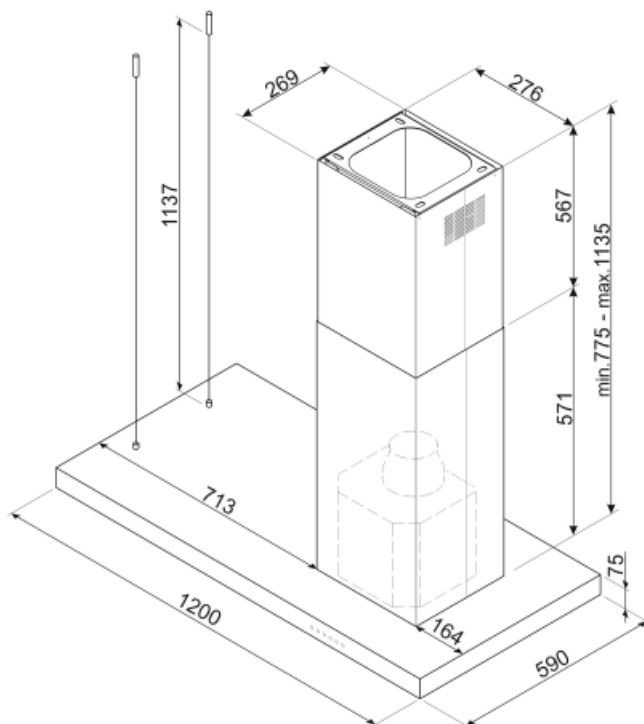

Not included accessories



FLT6











Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		...
	...		...