

# KLTI12L4MB

|                           |                          |
|---------------------------|--------------------------|
| <b>Product family</b>     | Hood                     |
| <b>Hood Type</b>          | Decorative island hood   |
| <b>Design</b>             | T flat                   |
| <b>Extraction</b>         | Extraction               |
| <b>Electronic control</b> | Yes                      |
| <b>Material</b>           | Painted material + Glass |
| <b>EAN code</b>           | 8017709312251            |
| <b>Hood width</b>         | 120 cm                   |
| <b>Aesthetic</b>          | Universale               |
| <b>Colour</b>             | Matt Black               |
| <b>Glass Type</b>         | Black                    |
| <b>Logo</b>               | Silk screen              |



## Controls

|                        |                                     |                  |       |
|------------------------|-------------------------------------|------------------|-------|
| <b>Control setting</b> | Touch control back-lighted<br>White | <b>Led color</b> | White |
|------------------------|-------------------------------------|------------------|-------|

## Program / Functions

|                                |   |
|--------------------------------|---|
| <b>No. of speeds</b>           | 3   |
| <b>Intensive speed</b>         |  |
| <b>24h air filter function</b> |  |
| <b>Time-setting options</b>    |  |
| <b>Auto-vent 2.0</b>           |  |

## Technical Features



|                                      |                       |   |           |
|--------------------------------------|-----------------------|---|-----------|
| <b>No. of lights</b>                 | 2                     | <b>No. of filters</b>                     | 3         |
| <b>Light type</b>                    | LED                   | <b>Anti-grease filters</b>                | Aluminium |
| <b>Light Power</b>                   | 7,4 W                 | <b>Filter replacement indicator</b>       | Yes       |
| <b>Dimmer mode</b>                   | Yes                   | <b>Vent outlet</b>                        | 150 mm    |
| <b>Light color temperature range</b> | 2700 - 4000 K         | <b>Minimum distance from GAS hob</b>      | 750 mm    |
| <b>Free outlet maximum capacity</b>  | 820 m <sup>3</sup> /h | <b>Minimum distance from ELECTRIC hob</b> | 650 mm    |
| <b>Motor power</b>                   | 275 W                 | <b>Non return valve</b>                   | Yes       |

|                 | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1         | 220   | 43                               |
| Speed 2         | 335   | 53                               |
| Speed 3         | 560   | 65                               |
| Intensive speed | 739   | 71                               |

## Accessories included

Tube reduction Yes

## Performance / Energy Label



|  |                       |  |                       |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood)  | 55 kWh/a              | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 43 dBA                |
| Energy efficiency class (EEC)            | A                     | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 66 dBA                |
| Fluid Dynamic Efficiency (FDE)           | 33,9                  | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA                |
| Fluid Dynamic Efficiency class (FDEC)    | A                     | Energy Efficiency Index  | 51,5                  |
| Lighting Efficiency (LE)                 | 20,3 lux/W            | Measured air flow rate at best efficiency point (Qbep)                         | 384 m <sup>3</sup> /h |
| Lighting Efficiency Class (LEC)          | D                     | Measured air pressure at best efficiency point (Pbep)                          | 376 Pa                |
| Grease Filtering Efficiency (GFE)        | 73,2 %                | Measured electric power input at best efficiency point (Wbep)                  | 151 W                 |
| Grease Filtering Efficiency Class (GFEC) | D                     | Nominal Power consumption of the light system (WL)                             | 15 W                  |
| Air flow at minumum speed (Qmin)         | 220 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 300 lux               |
| Air flow at maximum speed (Qmax)         | 560 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 66 dBA                |
| Air flow at boost speed (Qboost)         | 739 m <sup>3</sup> /h |  |                       |

## Electrical Connection

|                              |       |                           |         |
|------------------------------|-------|---------------------------|---------|
| Electrical connection rating | 291 W | Power supply cable length | 1500 mm |
|------------------------------|-------|---------------------------|---------|


---

|                |           |      |             |
|----------------|-----------|------|-------------|
| Voltage        | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz  |      |             |

## Also available

---

|                               |            |                   |            |
|-------------------------------|------------|-------------------|------------|
| Alternative colours available | Matt Black | Available colours | KLT112L4MB |
|-------------------------------|------------|-------------------|------------|

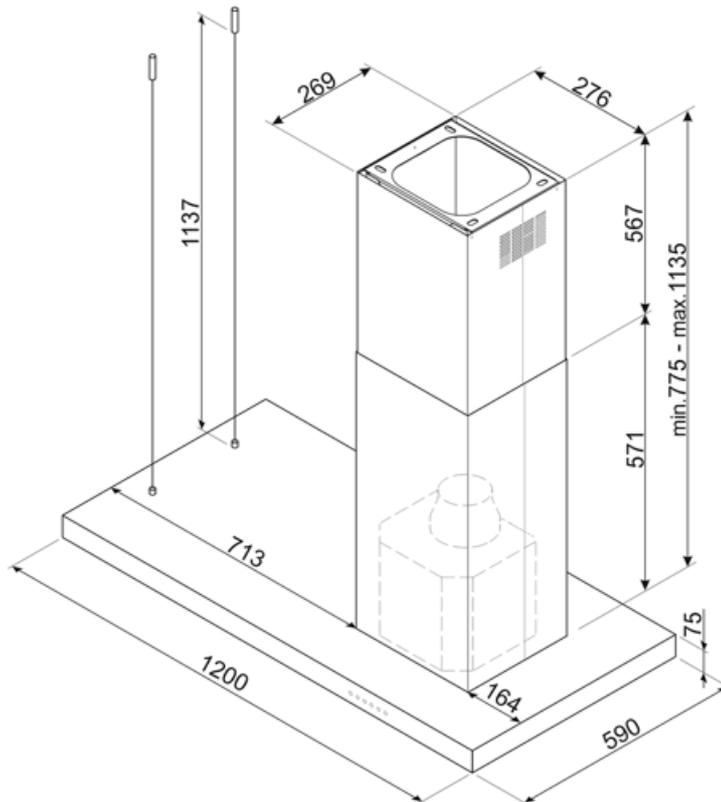

---


## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCKBT

1 pc of charcoal filter for the hood models KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

---

## Symbols glossary

---

|  |   |   |  |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                            |
|  | Connection between hob and hood   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Energy efficiency class A   |  | Dimmering Lights   |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Tunable white from warm to cold.  |  | Intensive/turbo setting: when extra fast extraction is required.   |