

KLTI12L4X

Product family Hood

Hood Type Island Cooker Hoods

T flat Design

Extraction Ducted out or re-circulation possible

Electronic control Yes

Material Stainless Steel + Glass

Type of steel **Brushed**

EAN code 8017709312244

Hood width 120 cm **Aesthetics** Universal

Colour Stainless Steel and Glass

Finishing Brushed Glass Type Black Logo Silk screen



Controls

Control setting Touch control back-lighted Led colour White

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-Vent 2.0









Technical Features














Light type LED Light power 7.4 W Dimmer mode Yes

Light colour temperature range

Free outlet maximum

capacity

2700 - 4000 K

820 m³/h

Motor power 275 W No. of filters

Anti-grease filters Filter replacement

indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

650 mm

150 mm

750 mm

Aluminium

Yes

Non return valve

Yes

SMEG SPA 01/12/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	220	43
Speed 2	335	53
Speed 3	560	65
Intensive speed	739	71

Accessories Included

Tube reduction Yes

Performance / Energy Label

/	A***
	Ť

Annual Efficiency 55 kWh/year Airbourne acouistical A- 43 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficiency class (A speed (SPEmin) Airborne acoustical A-66 dBA Fluid Dynamic Efficiency 33,9 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 71 dBA Lighting Efficiency (LE) 20,3 lux/W weighted sound power Lighting Efficiency Class D emission at boost speed (LEC) (SPEboost) **Grease Filtering** 73,2 % **Energy Efficiency Index** 51,5 Efficiency (GFE) per first cavity **Grease Filtering** Measured air flow rate 384 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 220 m³/h (Qbep) speed (Qmin) Measured air pressure 376 Pa Maximum extraction 560 m³/h at best efficiency point rate (Qbep) Intensive extraction rate 739 m³/h Measured electric 151 W power input at best efficiency point (Wbep) Normal Power of the 15 W light system (WI) Average illumination of 300 lux the light on the cooking surface (Emiddle)

Electrical Connection

Nominal power 291 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1500 mm length

SMEG SPA 01/12/2025

Sound power level at

highest setting (Lwa)

66 dBA




Also available

Alternative colours availible

Matte Black

Available colours

KLTI12L4MB

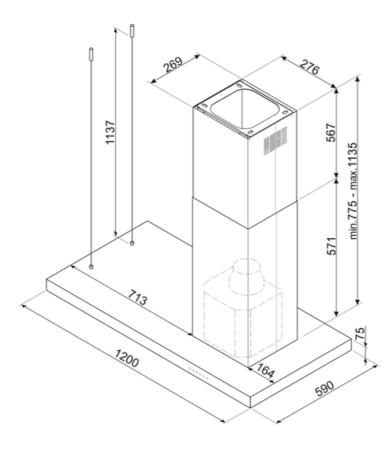

SMEG SPA 01/12/2025



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 01/12/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Connection between hob and hood



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A: Product drying performance, measured from A+++ to D / G depending on the product family



..



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



...

SMEG SPA 01/12/2025