

# KLTI12L4X

**Product family** Hood

**Hood Type** Decorative island hood

T flat Design Extraction Extraction Yes **Electronic control** 

Stainless Steel + Glass Material

Type of steel Brushed

EAN code 8017709312244

120 cm Hood width **Aesthetic** Universale

Colour Stainless Steel and Glass

**Finishing** Satin Glass Type Black Logo Silk screen



#### **Controls**

Control setting Touch control back-lighted Led color White

White

### **Program / Functions**

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









### **Technical Features**













No. of lights 2 Light type **LED Light Power** 7.4 W Dimmer mode Yes

Light color temperature

range

Free outlet maximum

capacity

2700 - 4000 K

820 m<sup>3</sup>/h

Motor power 275 W No. of filters

Anti-grease filters

Filter replacement

indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from

**ELECTRIC hob** 

Non return valve

650 mm

150 mm

750 mm

Aluminium

Yes

Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	220	43
Speed 2	335	53
Speed 3	560	65
Intensive speed	739	71

## Accessories included

Tube reduction Yes

# Performance / Energy Label

A	
Annual Efficiency	55 kWh/a
Consumption (AEChood)	
Energy efficicency class (EEC)	Α
Fluid Dynamic Efficiency (FDE)	33,9
Fluid Dynamic Efficiency class (FDEC)	Α
Lighting Efficiency (LE)	20,3 lux/W
<b>Lighting Efficiency Class</b>	D
(LEC)	
Grease Filtering	73,2 %
Efficiency (GFE)	
Grease Filtering	D
Efficiency Class (GFEC)	
Air flow at minumum	220 m³/h
speed (Qmin)	
Air flow at maximum speed (Qmax)	560 m³/h
Air flow at boost speed	739 m³/h

Airbourne acouistical A- weighted sound Power Emission at minimum speed (SPEmin)	43 dBA
Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	71 dBA
Energy Efficiency Index	51,5
Measured air flow rate at best efficiency point (Qbep)	384 m³/h
Measured air pressure at best efficiency point (Pbep)	376 Pa
Measured electric power input at best efficiency point (Wbep)	151 W
Nominal Power consumption of the light system (WL)	15 W
Average illumination of the light on the cooking surface (Emiddle)	300 lux
Sound power level at highest setting (Lwa)	66 dBA

### **Electrical Connection**

(Qboost)

Electrical connection 291 W Power supply cable 1500 mm rating length




Voltage 220-240 V Plug Not present

Frequency (Hz) 50-60 Hz

## Also available

Alternative colours Matt Black Available colours KLTI12L4MB available

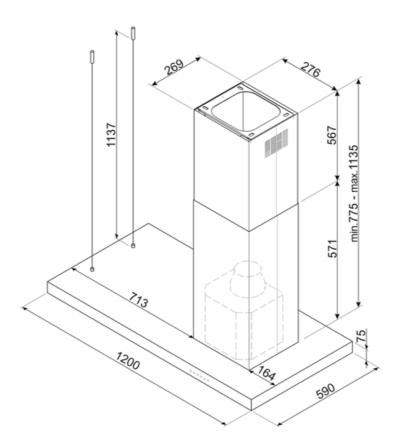



# **Compatible Accessories**



#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



#### **KITFCKBT**

1 pc of charcoal filter for the hood models KBT\* / KBCT\*

#### **KITFCKBTR**



1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



**Dimmering Lights** 



Tunable white from warm to cold