

# KLTI12L4X





Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709312244
Aesthetic	Universale
Colour	Stainless Steel and Glass
Finishing	Satin
Glass Type	Black
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	7.4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700° - 4000° °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	220	43
Speed 2	335	53
Speed 3	560	65
Intensive speed	739	71

## Accessories included

Tube reduction Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 55 kWh/a

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 33.9

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 20.3 lux/W

Lighting Efficiency Class (LEC) D

Grease Filtering Efficiency (GFE) 73.2 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at minumum speed (Qmin) 220 m³/h

Air flow at maximum speed (Qmax) 560 m³/h

Air flow at boost speed (Qboost) 739 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 43 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 66 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 71 dBA

Energy Efficiency Index 51.5

Measured air flow rate at best efficiency point (Qbep) 384 m³/h

Measured air pressure at best efficiency point (Pbep) 376 Pa

Measured electric power input at best efficiency point (Wbep) 151 W

Nominal Power consumption of the light system (WL) 15 W

Average illumination of the light on the cooking surface (Emiddle) 300 lux

Sound power level at highest setting (Lwa) 66 dBA


## Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz

Electrical connection rating	291 W	Power supply cable length	1500 mm
Voltage	220-240 V		

## Also available

Alternative colours available	Matt Black	Available colours	KLT112L4MB
-------------------------------	------------	-------------------	------------

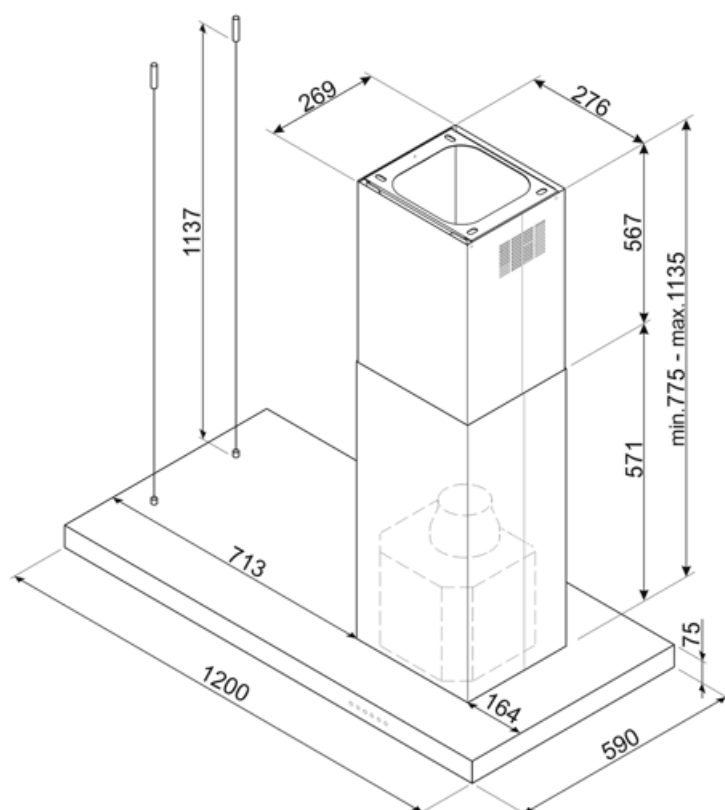

---

## Compatible Accessories

---




### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimming Lights



Tunable white from warm to cold

---

## Benefit (TT)

---

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.