

# KLTI9L4MB

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Painted material + Glass
EAN code	8017709312275
Hood width	90 cm
Aesthetic	Universale
Colour	Matt Black
Glass Type	Black
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	7.4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700 - 4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	214	40
Speed 2	334	51
Speed 3	563	64
Intensive speed	741	70

## Accessories included

Tube reduction Yes

## Performance / Energy Label

	Annual Efficiency Consumption (AEChood)		
Energy efficiency class (EEC)	A		
Fluid Dynamic Efficiency (FDE)	33.1		
Fluid Dynamic Efficiency class (FDEC)	A		
Lighting Efficiency (LE)	21.1 lux/W		
Lighting Efficiency Class (LEC)	B		
Grease Filtering Efficiency (GFE)	73.2 %		
Grease Filtering Efficiency Class (GFEC)	D		
Air flow at minimum speed (Qmin)	214 m³/h		
Air flow at maximum speed (Qmax)	563 m³/h		
Air flow at boost speed (Qboost)	741 m³/h		
	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)		
	Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)		
	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)		
	Energy Efficiency Index		
	Measured air flow rate at best efficiency point (Qbep)		
	Measured air pressure at best efficiency point (Pbep)		
	Measured electric power input at best efficiency point (Wbep)		
	Nominal Power consumption of the light system (WL)		
	Average illumination of the light on the cooking surface (Emiddle)		
	Sound power level at highest setting (Lwa)		

## Electrical Connection

Electrical connection rating 293 W Power supply cable length 1500 mm


---

<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

---

<b>Alternative colours available</b>	Matt Black	<b>Available colours</b>	KLTI9L4MB
--------------------------------------	------------	--------------------------	-----------

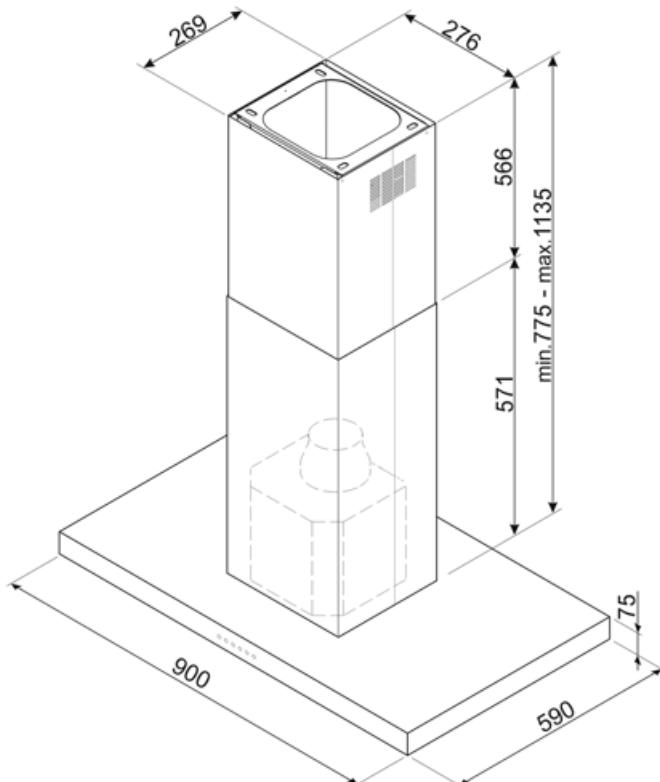

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Energy efficiency class A
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		Connection between hob and hood
	Dimmering Lights		Tunable white from warm to cold.