

KLTI9L4X

| | |
|--------------------|---------------------------------------|
| Product family | Hood |
| Hood Type | Island Cooker Hoods |
| Design | T flat |
| Extraction | Ducted out or re-circulation possible |
| Electronic control | Yes |
| Material | Stainless Steel + Glass |
| Type of steel | Brushed |
| EAN code | 8017709312268 |
| Hood width | 90 cm |







Aesthetics

| | | | |
|------------|---------------------------|------------|-------------|
| Aesthetics | Universal | Glass Type | Black |
| Colour | Stainless Steel and Glass | Logo | Silk screen |
| Finishing | Brushed | | |


Controls

| | | | |
|-----------------|-------------------------------------|------------|-------|
| Control setting | Touch control back-lighted White | Led colour | White |
|-----------------|-------------------------------------|------------|-------|

Programs / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |
| Auto-Vent 2.0 |  |

Technical Features

| | | | | |
|--|---------------|-------|---------------------|-----------|
|      | No. of lights | 2 | No. of filters | 3 |
| | Light type | LED | Anti-grease filters | Aluminium |
| | Light power | 7.4 W | | |

| | | | |
|--------------------------------|------------------|------------------------------------|--------|
| Dimmer mode | Yes | Filter replacement indicator | Yes |
| Light colour temperature range | 2700° - 4000° °K | Vent outlet | 150 mm |
| Free outlet maximum capacity | 820 m³/h | Minimum distance from GAS hob | 750 mm |
| Motor power | 275 W | Minimum distance from ELECTRIC hob | 650 mm |
| | | Non return valve | Yes |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|-----------------|----------------------------------|------------------------------------|
| Speed 1 | 214 | 40 |
| Speed 2 | 334 | 51 |
| Speed 3 | 563 | 64 |
| Intensive speed | 741 | 70 |

Accessories Included

| | |
|----------------|-----|
| Tube reduction | Yes |
|----------------|-----|

Performance / Energy Label

| | | | |
|---|-------------|--|----------|
| A | | | |
| Annual Efficiency Consumption (AEChood) | 56 KWh/year | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 65 dB(A) |
| Energy efficiency class (EEC) | A | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 70 dB(A) |
| Fluid Dynamic Efficiency (FDE) | 33,1 | Power Consumption in Off mode (Po) | 0,49 W |
| Fluid Dynamic Efficiency class (FDEC) | A | Power consumption in stand-by mode (Ps) | 0,49 W |
| Lighting Efficiency (LE) | 21,1 lux/W | Energy Efficiency Index per first cavity | 51,6 |
| Lighting Efficiency Class (LEC) | B | Measured air flow rate at best efficiency point (Qbep) | 384 m³/h |
| Grease Filtering Efficiency (GFE) | 73,2 % | Measured air pressure at best efficiency point (Qbep) | 482 Pa |
| Grease Filtering Efficiency Class (GFEC) | D | Measured electric power input at best efficiency point (Wbep) | 155 W |
| Air flow at minumum speed (Qmin) | 214 m³/h | Normal Power of the light system (WI) | 15 W |
| Maximum extraction rate | 563 m³/h | | |
| Intensive extraction rate | 741 m³/h | | |
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 39 dB(A) | | |


| | |
|--|----------|
| Average illumination of the light on the cooking surface (Emiddle) | 390 lux |
| Sound power level at highest setting (Lwa) | 65 dB(A) |

Electrical Connection

| | | | |
|---------------|-----------|---------------------------|----------|
| Nominal power | 293 W | Frequency (Hz) | 50-60 Hz |
| Voltage | 220-240 V | Power supply cable length | 1500 mm |

Also available

| | | | |
|-------------------------------|------------|-------------------|-----------|
| Alternative colours available | Matt Black | Available colours | KLTi9L4MB |
|-------------------------------|------------|-------------------|-----------|

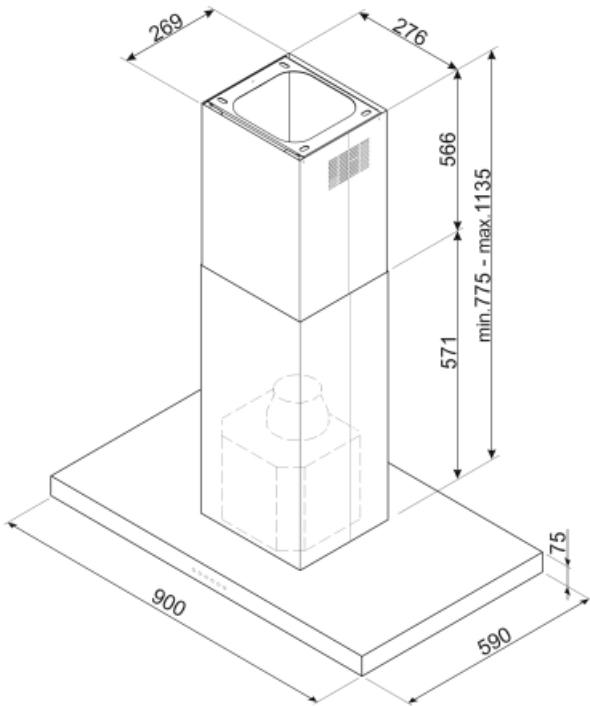

Not included accessories



FLT6











Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

| | | | |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | ... |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | ... |  | A: Product drying performance, measured from A+++ to D / G depending on the product family |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | ... |