

# KLTI9L4X





Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709312268
Aesthetics	Universal
Colour	Stainless Steel and Glass
Finishing	Brushed
Glass Type	Black
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7.4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	2700° - 4000° °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	214	40
Speed 2	334	51
Speed 3	563	64
Intensive speed	741	70

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 56 KWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 33,1

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 21,1 lux/W

Lighting Efficiency Class (LEC) B

Grease Filtering Efficiency (GFE) 73,2 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at minumum speed (Qmin) 214 m³/h

Maximum extraction rate 563 m³/h

Intensive extraction rate 741 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 39 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 65 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 70 dBA

Energy Efficiency Index per first cavity 51,6

Measured air flow rate at best efficiency point (Qbep) 384 m³/h

Measured air pressure at best efficiency point (Qbep) 482 Pa

Measured electric power input at best efficiency point (Wbep) 155 W

Normal Power of the light system (WI) 15 W

Average illumination of the light on the cooking surface (Emiddle) 390 lux

Sound power level at highest setting (Lwa) 65 dBA

## Electrical Connection

Nominal power 293 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1500 mm


## Also available

Alternative colours  
available

Matte Black

Available colours

KLT19L4MB

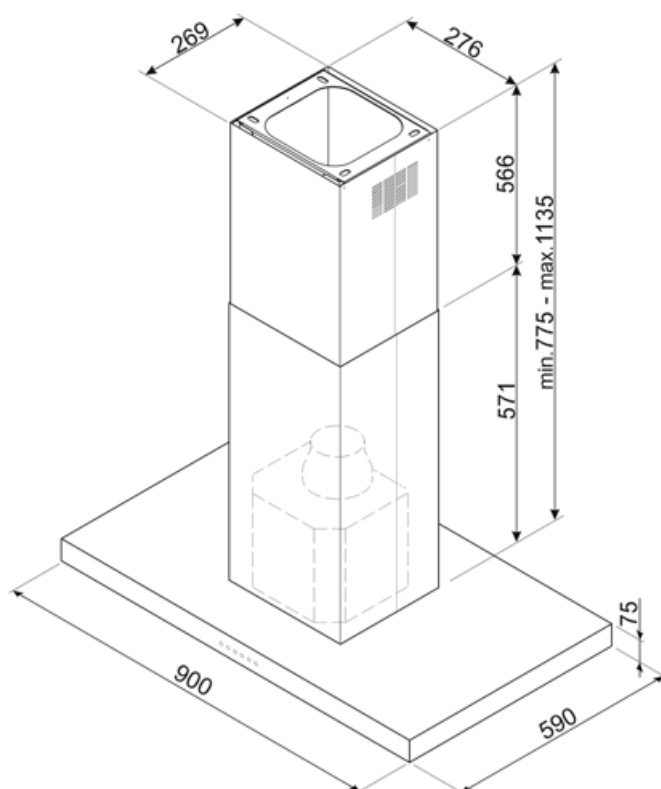

---

## Compatible Accessories

---



### FLT6











Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		...
	...		...

---

## Benefit

---

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralised and practical control via Bluetooth connection between hob and hood, letting you manage extraction automatically while you cook.

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.