

KLTI9L4X





Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709312268
Aesthetics	Universal
Colour	Stainless Steel and Glass
Finishing	Brushed
Glass Type	Black
Logo	Silk screen



Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7.4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	2700° - 4000° °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	214	40
Speed 2	334	51
Speed 3	563	64
Intensive speed	741	70

Accessories Included

Tube reduction Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 56 KWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 33,1

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 21,1 lux/W

Lighting Efficiency Class (LEC) B

Grease Filtering Efficiency (GFE) 73,2 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at minumum speed (Qmin) 214 m³/h

Maximum extraction rate 563 m³/h

Intensive extraction rate 741 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 39 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 65 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 70 dBA

Power Consumption in Off mode (Po) 0,49 W

Power consumption in stand-by mode (Ps) 0,49 W

Energy Efficiency Index per first cavity 51,6

Measured air flow rate at best efficiency point (Qbep) 384 m³/h

Measured air pressure at best efficiency point (Qbep) 482 Pa

Measured electric power input at best efficiency point (Wbep) 155 W

Normal Power of the light system (WI) 15 W

Average illumination of the light on the cooking surface (Emiddle) 390 lux

Sound power level at highest setting (Lwa) 65 dBA

Electrical Connection

Nominal power 293 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable
length

1500 mm


Also available

Alternative colours
available

Matt Black

Available colours

KLT19L4MB

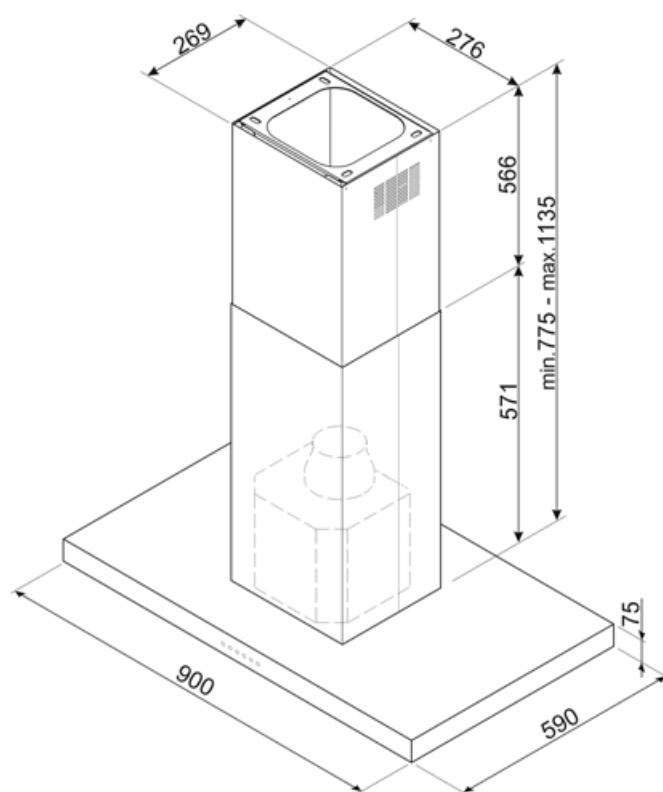

Compatible Accessories



FLT6











Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		...
	...		...

Benefit

Touch display back lighted white

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

Autovent 2.0

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.