

# KLT19L4X





Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709312268
Hood width	90 cm
Aesthetics	Universal
Colour	Stainless Steel and Glass
Finishing	Brushed
Glass Type	Black
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7.4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	2700 - 4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	214	40
Speed 2	334	51
Speed 3	563	64
Intensive speed	741	70

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	56 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	39 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Fluid Dynamic Efficiency (FDE)	33.1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Energy Efficiency Index per first cavity	51.6
Lighting Efficiency (LE)	21.1 lux/W	Measured air flow rate at best efficiency point (Qbep)	384 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	B	Measured air pressure at best efficiency point (Qbep)	482 Pa
Grease Filtering Efficiency (GFE)	73.2 %	Measured electric power input at best efficiency point (Wbep)	155 W
Grease Filtering Efficiency Class (GFEC)	D	Normal Power of the light system (WI)	15 W
Air flow at minumum speed (Qmin)	214 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	390 lux
Maximum extraction rate	563 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	65 dBA
Intensive extraction rate	741 m <sup>3</sup> /h		

## Electrical Connection

Nominal power	293 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		


## Also available

Alternative colours available

Matte Black

Available colours

KLT19L4MB

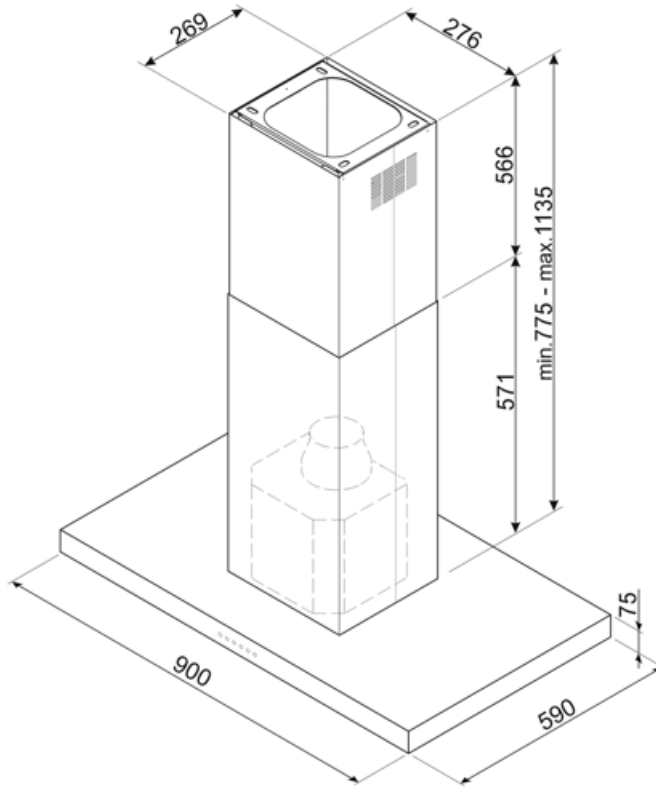

---

## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCKBT










1 pcs of activated carbon filter for hood models KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

## Symbols glossary

- |  |   |   |  |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | A: Product drying performance, measured from A+++ to D / G depending on the product family   |
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | Connection between hob and hood  |
|  | Dimmering Lights  |  | Tunable white from warm to cold.   |