

# KLT19L4X

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709312268
Hood width	90 cm







## Aesthetics

Aesthetic Colour Finishing	Universale Stainless Steel and Glass Satin	Glass Type Logo	Black Silk screen
----------------------------	--	--------------------	----------------------

## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features

    	No. of lights	2	No. of filters	3
	Light type	LED	Anti-grease filters	Aluminium
	Light Power	7.4 W		

<b>Dimmer mode</b>	Yes	<b>Filter replacement indicator</b>	Yes
<b>Light color temperature range</b>	2700° - 4000° °K	<b>Vent outlet</b>	150 mm
<b>Free outlet maximum capacity</b>	820 m³/h	<b>Minimum distance from GAS hob</b>	750 mm
<b>Motor power</b>	275 W	<b>Minimum distance from ELECTRIC hob</b>	650 mm
		<b>Non return valve</b>	Yes

	<b>Extraction rate IEC 61591 [m³/h]</b>	<b>Noise level IEC 60704-2-13 [dB(A)]</b>
Speed 1	214	40
Speed 2	334	51
Speed 3	563	64
Intensive speed	741	70

## Accessories Included

<b>Tube reduction</b>	Yes
-----------------------	-----

## Performance / Energy Label



<b>Annual Efficiency Consumption (AEChood)</b>	56 kWh/a	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	65 dB(A)
<b>Energy efficiency class (EEC)</b>	A	<b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b>	70 dB(A)
<b>Fluid Dynamic Efficiency (FDE)</b>	33,1	<b>Power Consumption in Off mode (Po)</b>	0,49 W
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Power consumption in stand-by mode (Ps)</b>	0,49 W
<b>Lighting Efficiency (LE)</b>	21,1 lux/W	<b>Energy Efficiency Index</b>	51,6
<b>Lighting Efficiency Class (LEC)</b>	B	<b>Measured air flow rate at best efficiency point (Qbep)</b>	384 m³/h
<b>Grease Filtering Efficiency (GFE)</b>	73,2 %	<b>Measured air pressure at best efficiency point (Pbep)</b>	482 Pa
<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Measured electric power input at best efficiency point (Wbep)</b>	155 W
<b>Air flow at minumum speed (Qmin)</b>	214 m³/h	<b>Nominal Power consumption of the light system (WL)</b>	15 W
<b>Air flow at maximum speed (Qmax)</b>	563 m³/h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	390 lux
<b>Air flow at boost speed (Qboost)</b>	741 m³/h		
<b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	39 dB(A)		


Sound power level at highest setting (Lwa) 65 dB(A)

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	293 W	Power supply cable length	1500 mm
Voltage	220-240 V		

## Also available

Alternative colours available	Matt Black	Available colours	KLT19L4MB
-------------------------------	------------	-------------------	-----------

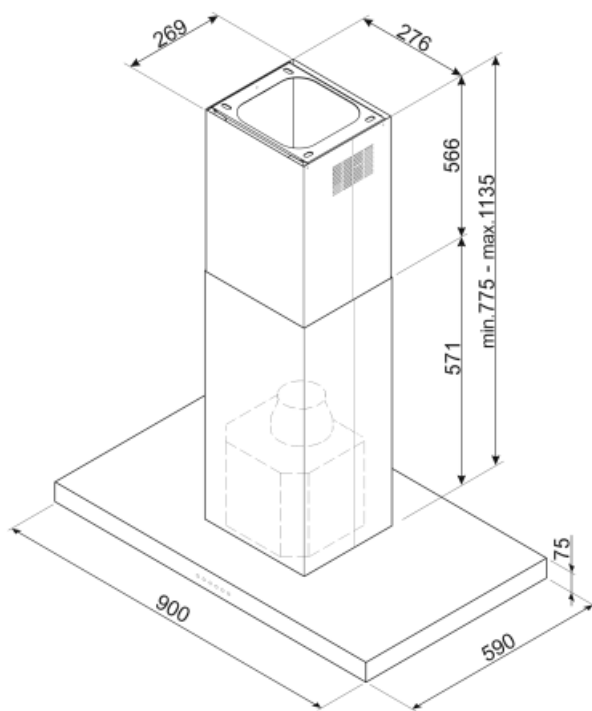

---

## Not included accessories

---



**FLT6**











Round Charcoal filters (kit 2 pieces)



**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary (TT)

- |  |   |   |  |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  |  |
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | Connection between hob and hood  |
|  | Dimming Lights  |  | Tunable white from warm to cold  |