

KPF12BL

Product family

Hood
Chimney Cooker Hoods

Design
Chimney

Extraction
Ducted out or re-circulation possible

Material
Stainless Steel + Painted Material

Type of steel
Brushed

EAN code
8017709261634

Hood width
120 cm

Aesthetics
Portofino

Colour
Black

Serigraphy colour
Black

Logo
Applied



Controls

Control setting

Control knobs
2

Control knobs

Controls colour

Portofino

Steel effect

Program / Functions

No. of speeds

Intensive speed

3



Technical Features



No. of lights

4

No. of filters

4

Anti-grease filters

Stainless steel

Vent outlet

150 mm

Minimum distance from
GAS hob

650 mm

Minimum distance from
ELECTRIC hob

650 mm

Non return valve

Yes

Light type
LED

Light power
4 W

Light colour
4000 K

temperature scale (K)

Free outlet maximum
capacity

Motor power
275 W

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	287	49
Speed 2	389	58

Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	42 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Energy efficiency class (A+ EEC)		Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	36,3	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	73 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	74,8 lux/W	Energy Efficiency Index per first cavity	41,4
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	400 m ³ /h
Grease Filtering Efficiency (GFE)	74,9 %	Measured air pressure at best efficiency point (Qbep)	490 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	150 W
Air flow at minimum speed (Qmin)	287 m ³ /h	Normal Power of the light system (WI)	4 W
Maximum extraction rate	606 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	329 lux
Intensive extraction rate	777 m ³ /h	Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Nominal power	280 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available	White, Black, Stainless steel, Red, Turquoise	Available colours	KPF12WH/BL/X/RD/T
--------------------------------------	---	--------------------------	-------------------

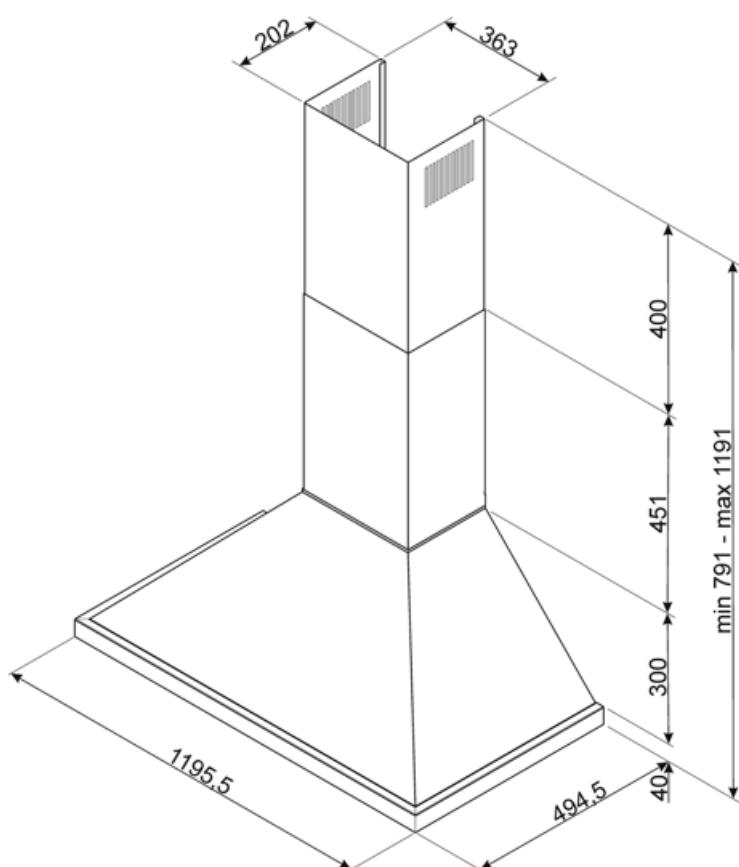

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.