

KPF12BL

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

ExtractionDucted out or re-circulation possibleMaterialStainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709261634

Hood width 120 cm
Aesthetics Portofino
Colour Black
Serigraphy colour Black
Logo Applied



Controls

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed 3 800ST

Technical Features





No. of lights 4 No. of filters 4

Light typeLEDAnti-grease filtersStainless steelLight power4 WVent outlet150 mmLight colour4000 KMinimum distance from
650 mm

temperature scale (K) GAS hob

Free outlet maximum 815 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	287	49
Speed 2	389	58



Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label

A T

Annual Efficiency 42 kWh/year Consumption (AEChood)

Energy efficiency class (A+ EEC)

Fluid Dynamic Efficiency 36.3 (FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 74.8 lux/W

Lighting Efficiency Class A (LEC)

Grease Filtering

74.9 %

Efficiency (GFE)

Grease Filtering Efficiency Class (GFEC)

Air flow at minumum 287 m³/h

speed (Qmin)

Maximum extraction

606 m³/h

Intensive extraction rate 777 m³/h

Airbourne acouistical A- 49 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-67 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Airbourne acoustical A- 73 dBA

weighted sound power emission at boost speed (SPEboost)

Time increase factor (F) 0.7 **Energy Efficiency Index** 41.4

per first cavity

Measured air flow rate 400 m³/h

at best efficiency point (Qbep)

Measured air pressure

at best efficiency point

(Qbep)

Measured electric 150 W

power input at best efficiency point (Wbep)

Normal Power of the light system (WI)

Average illumination of the light on the cooking

surface (Emiddle)

Sound power level at highest setting (Lwa)

4 W 329 lux

490 Pa

67 dBA

Electrical Connection

Nominal power 280 W Voltage 220-240 V

Frequency (Hz) Power supply cable 50-60 Hz 1000 mm

length

Also available


Alternative colours availible

White, Black, Stainless steel, Red, Turquoise

Available colours

KPF12WH/BL/X/RD/T



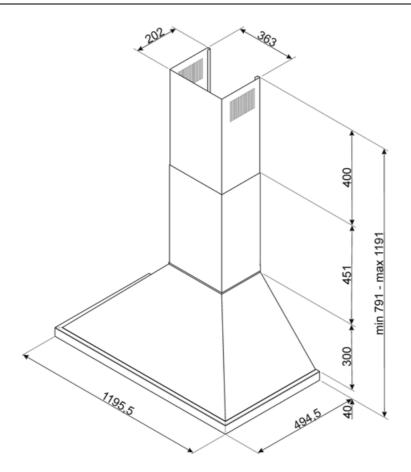



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.