

# KPF12BL

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtraction

Material Stainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709261634

Hood width 120 cm
Aesthetic Portofino
Colour Black
Serigraphy colour Black
Logo Applied



### **Controls**

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

## **Program / Functions**

No. of speeds Intensive speed

3 800ST

#### **Technical Features**





No. of lights 4 No. of filters 4

Light typeLEDAnti-grease filtersStainless steelLight Power4 WVent outlet150 mmLight color temperature4000 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 815 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	287	49
Speed 2	389	58



Speed 3	606	67
Intensive speed	777	73

## Performance / Energy Label

tr
Ť
۸÷

**Annual Efficiency** 42 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A+ speed (SPEmin) (EEC) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 36,3 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 73 dBA Lighting Efficiency (LE) 74,8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 74.9 % Time increase factor (F) 0,7 Efficiency (GFE) **Energy Efficiency Index** 41,4 **Grease Filtering** Measured air flow rate 400 m<sup>3</sup>/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 287 m<sup>3</sup>/h (Qbep) speed (Qmin) Measured air pressure 490 Pa Air flow at maximum 606 m<sup>3</sup>/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 777 m<sup>3</sup>/h Measured electric 150 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 4 W consumption of the light system (WL) Average illumination of 329 lux the light on the cooking surface (Emiddle)

#### **Electrical Connection**

Electrical connection 280 W Power supply cable 1000 mm

rating length

Voltage 220-240 V Plug Not present

Frequency (Hz) 50-60 Hz

### Also available

Alternative colours White, Black, Stainless Available colours KPF12WH/BL/X/RD/T available steel, Red, Turquese


SMEG SPA 12/12/2025

Sound power level at

highest setting (Lwa)

67 dBA



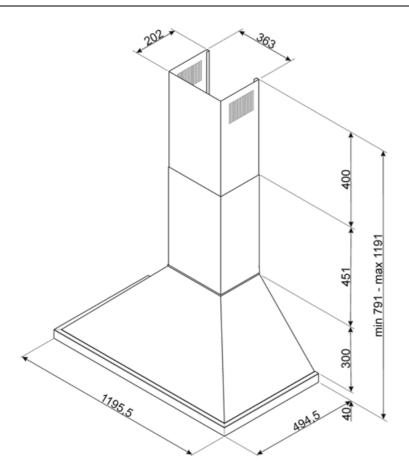



# **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



## Symbols glossary



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.