

KPF12RD

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

ExtractionDucted out or re-circulation possible **Material**Stainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709261665

Hood width120 cmAestheticsPortofinoColourRedSerigraphy colourBlackLogoApplied



Controls

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3 800ST

Technical Features





No. of lights 4 No. of filters 4

Light typeLEDAnti-grease filtersStainless steelLight power4 WVent outlet150 mmLight colour4000 KMinimum distance from
650 mm

temperature scale (K) GAS hob

Free outlet maximum 815 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	287	49
Speed 2	389	58



Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label

		tr
<	Δ^{-}	Ť

Annual Efficiency 42 kWh/year Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficiency class (A+ speed (SPEmin) Airborne acoustical A-Fluid Dynamic Efficiency 36.3 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 73 dBA Lighting Efficiency (LE) 74.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 74.9 % Time increase factor (F) 0.7 Efficiency (GFE) **Energy Efficiency Index Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate Air flow at minumum 287 m³/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 606 m³/h Measured air pressure at best efficiency point Intensive extraction rate 777 m³/h (Qbep) Measured electric power input at best Normal Power of the

150 W efficiency point (Wbep) 4 W light system (WI) Average illumination of 329 lux the light on the cooking surface (Emiddle) Sound power level at 67 dBA highest setting (Lwa)

67 dBA

41.4

400 m³/h

490 Pa


Electrical Connection

Nominal power 280 W Frequency (Hz) 50-60 Hz Voltage 220-240 V 1000 mm Power supply cable length

Also available

Alternative colours White, Black, Stainless Available colours KPF12WH/BL/X/T availible steel, Turquoise



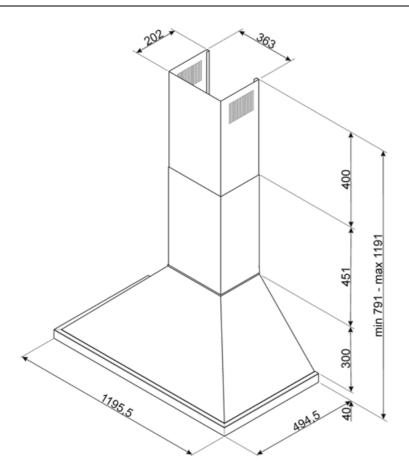



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.